

RF POWER TRIODE

QUICK REFERENCE DATA				
Frequency (MHz)	C telegr.		C an. mod.	
	V_a (V)	W_o (W)	V_a (V)	W_o (W)
175	2500	475	2000	505
300	2000	460	1600	370
470	1750	405	1400	275
600	1600	350	1280	225
900	1300	155	1040	107
Industrial oscillator class C				
Frequency (MHz)	AC operation		Single-phase full-wave with filter	
	V_{tr} (V)	W_o (W)	V_a (V)	W_o (W)
470	1750	235	1750	385

HEATING: direct; filament thoriated tungsten

Frequency	f	< 600	600 to 750	750 to 900	MHz
Filament voltage	V_f	= 3.4	3.3	3.2	V
Filament current	I_f	= 19	-	-	A

CAPACITANCES

Anode to all except grid	C_a	< 0.12	pF
Grid to all except anode	C_g	= 9	pF
Anode to grid	C_{ag}	= 4	pF

TYPICAL CHARACTERISTICS

Anode voltage	V_a	= 2000	V
Anode current	I_a	= 150	mA
Amplification factor	μ	= 32	
Mutual conductance	S	= 10	mA/V

Table 1 Air cooling characteristics


W_a (W)	h (m)	t_j (°C)	q_{min} (m ³ /min)	ΔP Pa*
< 300	0	45	0.45	240
	1500	35	0.46	225
	3000	25	0.49	215

Temperature of envelope = max. 200 °C

Generally it will be necessary to direct an air flow to the centre filament seal.

MECHANICAL DATA

Net weight: 143 g

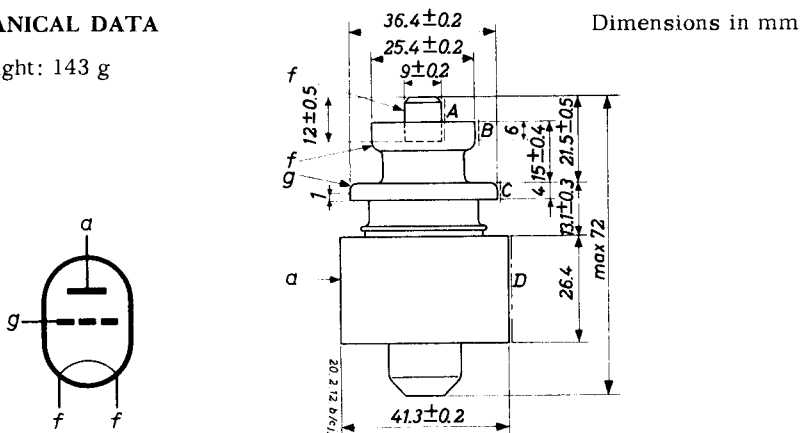
Fig. 1 Mechanical outline.

Eccentricity of the electrode connections: The electrode connections A, B and C are within cylindrical surfaces having a diameter of 9.5, 25.9 and 36.9 mm respectively and being coaxial with the cylindrical surface D.

Mounting position: vertical with anode up or down

* 1 Pa $\approx$ 0,1 mm H₂O.

RF CLASS C OSCILLATOR FOR INDUSTRIAL USE with self-rectification

LIMITING VALUES (Absolute limits)

Frequency	f	up to	470	MHz
Transformer voltage	V_{tr}	= max.	1800	V(RMS)
Anode current	I_a	= max.	210	mA
Anode input power	W_{ia}	= max.	400	W
Anode dissipation	W_a	= max.	170	W
Negative grid voltage	$-V_g$	= max.	500	V
Grid current, loaded	I_g	= max.	85	mA
Grid current, unloaded	I_g	= max.	120	mA
Grid circuit resistance	R_g	= max.	5	k Ω

OPERATING CONDITIONS

Frequency	f	=	470	MHz
Transformer voltage	V_{tr}	=	1750	V(RMS)
Anode current, loaded	I_a	=	185	mA
Anode current, unloaded	I_a	=	105	mA
Grid current, loaded	I_g	=	75	mA
Grid current, unloaded ¹⁾	I_g	=	80	mA
Grid circuit resistance under matched conditions	R_g	=	400	Ω
Anode input power	W_{ia}	=	365	W
Anode dissipation	W_a	=	130	W
Tube output power	W_o	=	235	W
Tube efficiency	η	=	64	%
Output power in the load ²⁾	W_ℓ	=	165	W

¹⁾ The grid resistance is obtained by a current stabilising device

²⁾ Measured by a calorimetric method

RF CLASS C OSCILLATOR FOR INDUSTRIAL USE with anode voltage from a single-phase full-wave rectifier with filter.

LIMITING VALUES (Absolute limits)

Frequency	f	up to	470	MHz
Anode voltage	V_a	= max.	1800	V
Anode current	I_a	= max.	400	mA
Anode input power	W_{ia}	= max.	700	W
Anode dissipation	W_a	= max.	300	W
Negative grid voltage	$-V_g$	= max.	300	V
Grid current, loaded	I_g	= max.	110	mA
Grid current, unloaded	I_g	= max.	120	mA
Grid circuit resistance	R_g	= max.	5	k Ω

OPERATING CONDITIONS

Frequency	f	=	470	MHz
Anode voltage	V_a	=	1750	V
Anode current, loaded	I_a	=	340	mA
Anode current, unloaded	I_a	=	170	mA
Grid current, loaded	I_g	=	95	mA
Grid current, unloaded ¹⁾	I_g	=	100	mA
Grid circuit resistance under matched conditions	R_g	=	1000	Ω
Anode input power	W_{ia}	=	595	W
Anode dissipation	W_a	=	210	W
Tube output power	W_o	=	385	W
Tube efficiency	η	=	65	%
Output power in the load	W_l	=	270	W

¹⁾ The grid resistance is obtained by a current stabilising device.

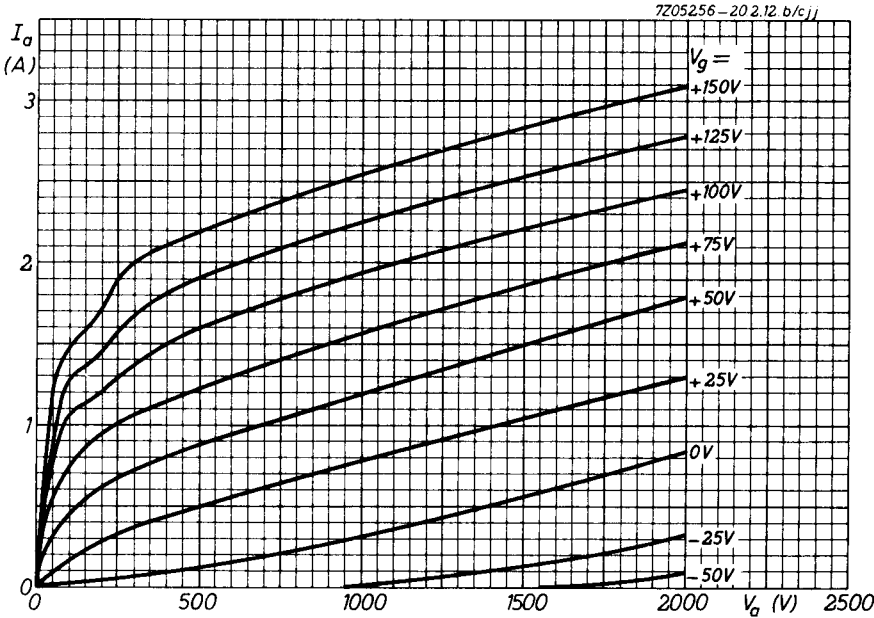


Fig. 2 I_a/V_a characteristics.

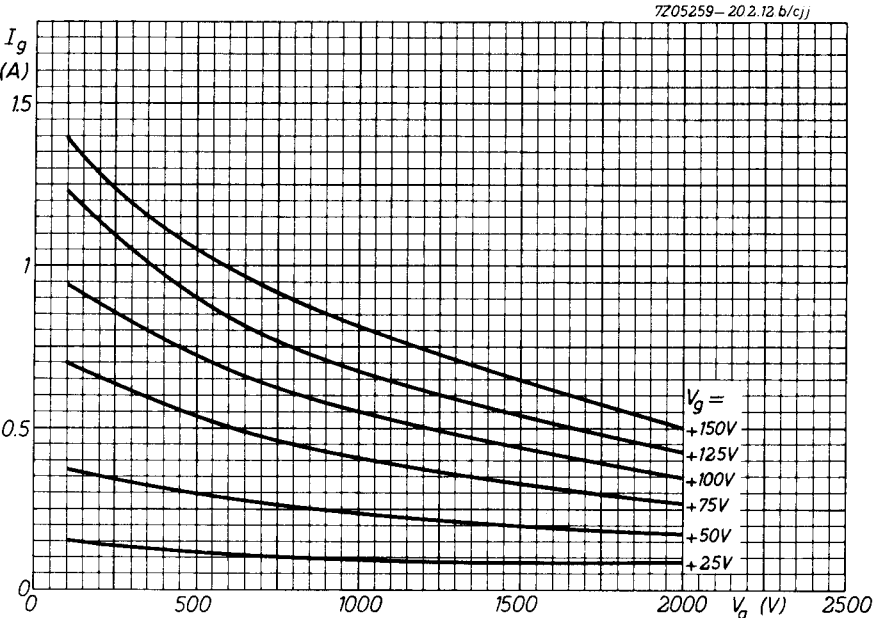


Fig. 3 I_g/V_a characteristics.

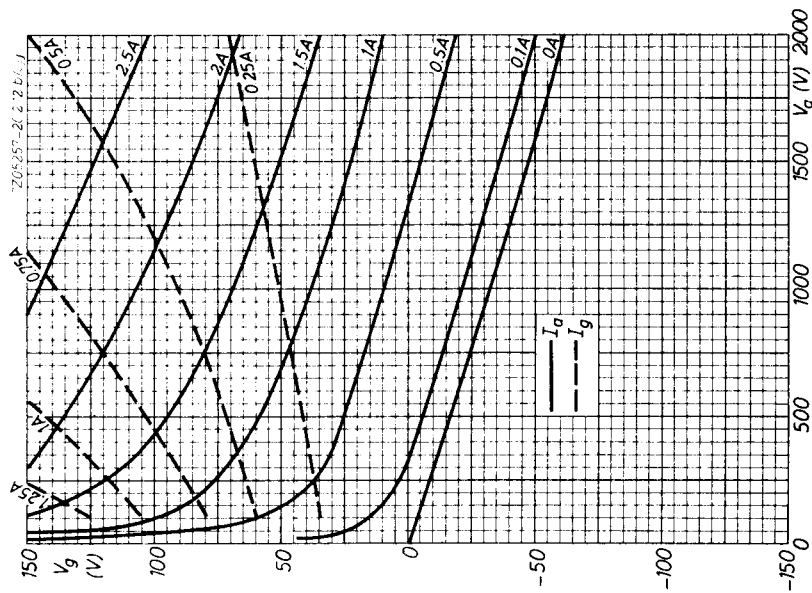


Fig. 5 Constant current characteristics.

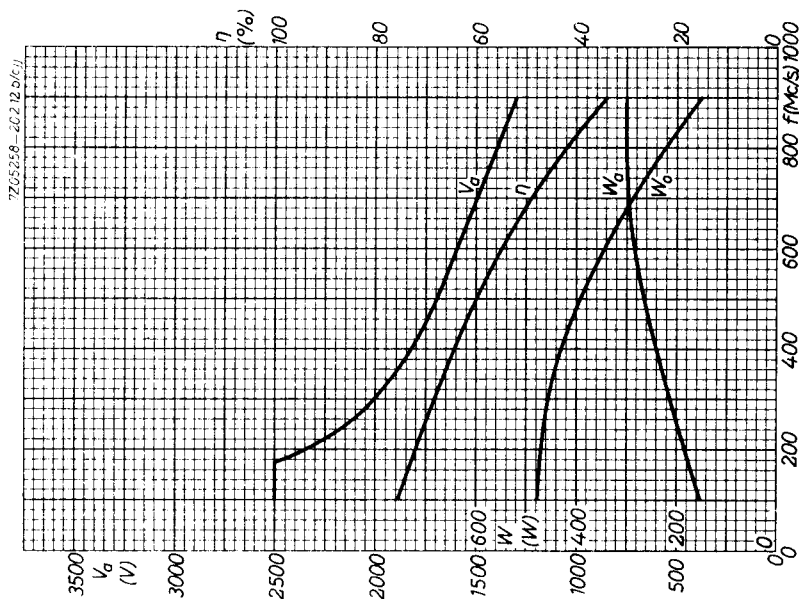


Fig. 4 Frequency dependant characteristics.

PHILIPS

Data handbook



**Electronic
components
and materials**

TBL2/300

page	sheet	date
1	93	1988.02
2	94	1988.02
3	95	1988.02
4	96	1988.02
5	97	1988.02
6	98	1988.02
7	FP	2000.09.16