

RF POWER TRIODE

QUICK REFERENCE DATA

freq. MHz	class-C										class-B	
	telegraphy		grounded grid		oscillator		oscillator, industrial				modulator	
	V _a kV	W _o W	V _a kV	W _o * W	V _a kV	W _o * W	V _a kV	W _o W	V _a kV	W _o W	V _a kV	W _o * W
100	4	1200			4	2320					4	1500
	3	840	3	1936	3	1626					3	1360
	2,5	750	2,5	1747							2,5	1140
	2	585	2	1374								
	1,5	425	1,5	1040								
50							3,5	1100	4	630		
							2,25	685	3	415		

HEATING: direct, parallel supply; thoriated tungsten filament

Filament voltage

$$V_f = 5 \text{ V}$$

Filament current

$$I_f = 14,1 \text{ A}$$

The filament is designed to accept temporary fluctuations of +5% and -10%

CAPACITANCES

Anode to all other elements except grid

$$C_a = 0,16 \text{ pF}$$

Grid to all other elements except anode

$$C_g = 6,3 \text{ pF}$$

Anode to grid

$$C_{ag} = 5,0 \text{ pF}$$

TYPICAL CHARACTERISTICS

Anode voltage

$$V_a = 3 \text{ kV}$$

Anode current

$$I_a = 90 \text{ mA}$$

Mutual conductance

$$S = 5 \text{ mA/V}$$

Amplification factor

$$\mu = 25$$

* Two tubes.

TEMPERATURE LIMITS

Absolute maximum rating system

Bulb temperature

Anode seal temperature

Pin temperature

T_{bulb}	max.	350 °C
T_a	max.	220 °C
T_{pin}	max.	180 °C

COOLING

In cases where the maximum permissible temperatures are likely to be exceeded, as would normally be the case at frequencies above 30 MHz with full ratings, a low-velocity air flow has to be directed onto the anode seal and the bottom of the envelope. The cooling will be facilitated by the use of a blower and a glass chimney type 40666.

MECHANICAL DATA

Socket

2422 512 01001

Anode connector (clip)

40624

Chimney

40666

Base

Giant 5 p.

Net mass

190 g

Dimensions in mm

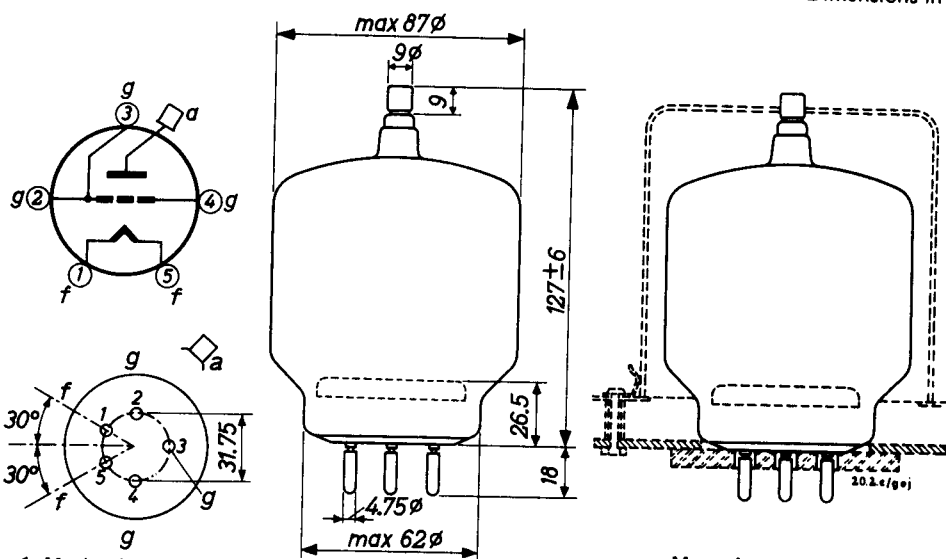


Fig. 1 Mechanical outline.

Mounting position

vertical with base up or down

Mounting suggestion of tube with chimney.

In order to prevent overheating of the grid pins by high-frequency current it is recommended to include the three grid socket connections in the circuit.

RF CLASS C TELEGRAPHY OR F.M. TELEPHONY

LIMITING VALUES (Absolute limits)

Frequency	f	up to	100	MHz
Anode voltage	V_a	= max.	4	kV
Anode input power	W_{ia}	= max.	1550	W
Anode dissipation	W_a	= max.	350	W
Negative grid voltage	$-V_g$	= max.	500	V
Grid dissipation	W_g	= max.	40	W
Grid circuit resistance	R_g	= max.	100	k Ω
Cathode current	I_k	= max.	500	mA

OPERATING CONDITIONS

Frequency	f	=	100	100	100	100	100	MHz
Anode voltage	V_a	=	4	3	2.5	2	1.5	kV
Grid voltage	V_g	=	-350	-250	-200	-150	-120	V
Peak grid AC voltage	V_{gp}	=	535	430	380	320	295	V
Anode current	I_a	=	380	363	400	400	400	mA
Grid current	I_g	=	80	69	69	80	80	mA
Driving power	W_{dr}	=	40	27	23.5	23	21.5	W
Anode input power	W_{ia}	=	1520	1090	1000	800	600	W
Anode dissipation	W_a	=	320	250	250	215	175	W
Output power	W_o	=	1200	840	750	585	425	W
Efficiency	η	=	79	77	75	73	71	%

RF CLASS C TELEGRAPHY OR FM TELEPHONY (continued)

OPERATING CONDITIONS, grounded grid, two tubes

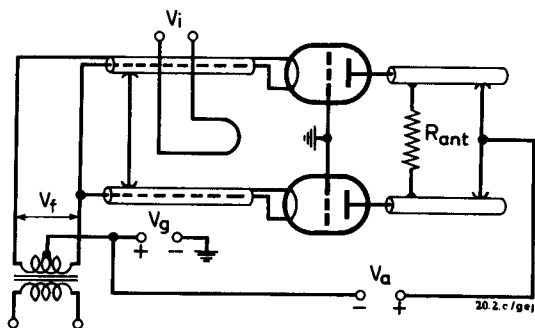


Fig. 2 Ground grid configuration.

Frequency	f	=	100	100	100	100	MHz
Anode voltage	V_a	=	3	2.5	2	1.5	kV
Grid voltage	V_g	=	-250	-200	-150	-120	V
Peak grid							
AC voltage	V_{gp}	=	430	380	320	295	V
Anode current	I_a	=	726	800	800	800	mA
Grid current	I_g	=	138	138	160	160	mA
Driving power	W_{dr}	=	310	294	250	233	W
Anode input power	W_{ia}	=	2180	2000	1600	1200	W
Anode dissipation	W_a	=	500	500	430	350	W
Output power	W_o	=	1680+256	1500+247	1170+204	850+190	W ¹⁾
Efficiency	η	=	77	75	73	71	%

¹⁾ Power transferred from driving stage included

RF CLASS C OSCILLATOR

LIMITING VALUES (Absolute limits)

Frequency	f	up to	100	MHz
Anode voltage	V_a	= max.	4	kV
Anode input power	W_{ia}	= max.	1550	W
Anode dissipation	W_a	= max.	350	W
Negative grid voltage	$-V_g$	= max.	500	V
Grid dissipation	W_g	= max.	40	W
Grid circuit resistance	R_g	= max.	100	k Ω
Cathode current	I_k	= max.	500	mA

OPERATING CONDITIONS, two tubes

Frequency	f	=	100	100	MHz
Anode voltage	V_a	=	4	3	kV
Anode current	I_a	=	760	726	mA
Grid current	I_g	=	160	138	mA
Grid resistor	R_g	=	2200	1800	Ω
Driving power	W_{dr}	=	80	54	W
Anode input power	W_{ia}	=	3040	2180	W
Anode dissipation	W_a	=	640	500	W
Output power	W_o	=	2320	1626	W
Efficiency	η	=	77	75	%

R F CLASS C OSCILLATOR FOR INDUSTRIAL USE with anode voltage from single-phase full-wave rectifier without filter

LIMITING VALUES (Absolute limits)

Frequency	f	up to 50	up to 100	up to 150	MHz
Anode voltage	V_a	= max. 3.8	max. 2.7	max. 1.8	kV
Anode input power	W_{ia}	= max. 1500	max. 975	max. 650	W
Anode dissipation	W_a	= max. 350	max. 350	max. 350	W
Negative grid voltage	$-V_g$	= max. 500	max. 500	max. 500	V
Grid dissipation	W_g	= max. 40	max. 40	max. 40	W
Grid circuit resistance	R_g	= max. 100	max. 100	max. 100	k Ω
Cathode current	I_k	= max. 450	max. 450	max. 450	mA

OPERATING CONDITIONS

Frequency	f	=	50	50	MHz
Anode voltage	V_a	=	3.5	2.25	kV
Anode current	I_a	=	325	340	mA
Grid current	I_g	=	65	60	mA
Grid resistor	R_g	=	4500	3330	Ω
Anode input power	W_{ia}	=	1400	935	W
Anode dissipation	W_a	=	300	250	W
Output power	W_o	=	1100	685	W
Efficiency	η	=	78	73	%
Output power in the load	W_l	=	900	560	W

RF CLASS C OSCILLATOR FOR INDUSTRIAL USE with self rectification,
180° phase shift between V_a and V_g

LIMITING VALUES (Absolute limits)

Frequency	f	up to 50	up to 100	up to 150	MHz
Transformer voltage	V_{tr}	= max. 4.5	max. 3.5	max. 2.25	kV _{RMS}
Anode input power	W_{ia}	= max. 900	max. 730	max. 500	W
Anode dissipation	W_a	= max. 350	max. 350	max. 350	W
Negative grid voltage	$-V_g$	= max. 500	max. 500	max. 500	V
Grid dissipation	W_g	= max. 40	max. 40	max. 40	W
Grid circuit resistance	R_g	= max. 100	max. 100	max. 100	kΩ
Cathode current	I_k	= max. 285	max. 285	max. 285	mA

OPERATING CONDITIONS

Frequency	f	=	50	50	MHz
Transformer voltage	V_{tr}	=	4	3	kV _{RMS}
Anode current	I_a	=	190	180	mA
Driving voltage	V_g	=	280	110	V _{RMS}
Grid current	I_g	=	35	32	mA
Grid resistor	R_g	=	5500	3000	Ω
Anode input power	W_{ia}	=	840	600	W
Anode dissipation	W_a	=	210	185	W
Output power	W_o	=	630	415	W
Efficiency	η	=	75	69	%
Output power in the load	W_l	=	515	350	W



AF CLASS B AMPLIFIER AND MODULATOR, two tubes in push-pull
LIMITING VALUES (Absolute limits)

Anode voltage	V_a	=	max.	4	kV
Anode input power	W_{ia}	=	max.	1550	W
Anode dissipation	W_a	=	max.	350	W
Negative grid voltage	$-V_g$	=	max.	500	V
Grid dissipation	W_g	=	max.	40	W
Grid circuit resistance	R_g	=	max.	100	k Ω
Cathode current	I_k	=	max.	500	mA

OPERATING CONDITIONS

V_a	=	4	3	2.5	kV
V_g	=	-135	-102	-77.5	V ¹⁾
$R_{aa} \sim$	=	20	14.5	12	k Ω
V_{ggp}	=	0 485	0 475	0 400	V
I_a	=	2x88 2x270	2x60 2x290	2x90 2x300	mA
I_g	=	0 2x30	0 2x60	0 2x55	mA
W_{dr}	=	0 2x7	0 2x13	0 2x10	W
W_{ia}	=	2x350 2x1080	2x180 2x870	2x225 2x750	W
W_a	=	2x350 2x305	2x180 2x190	2x225 2x180	W
W_o	=	0 1550	0 1360	0 1140	W
d_{tot}	=	- < 2.5	- < 2.5	- < 2.5	%
η	=	- 71.7	- 78.1	- 76	%

¹⁾ To be adjusted for zero signal anode current

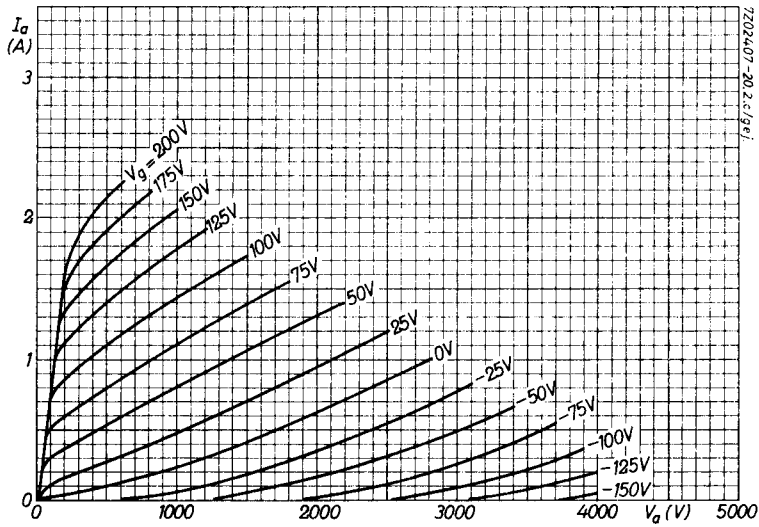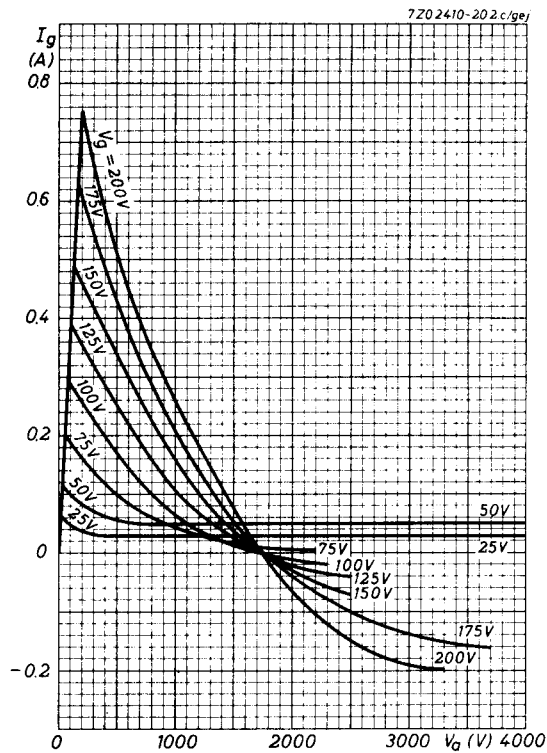Fig. 3 I_a/V_a characteristics.Fig. 4 I_g/V_a characteristics.

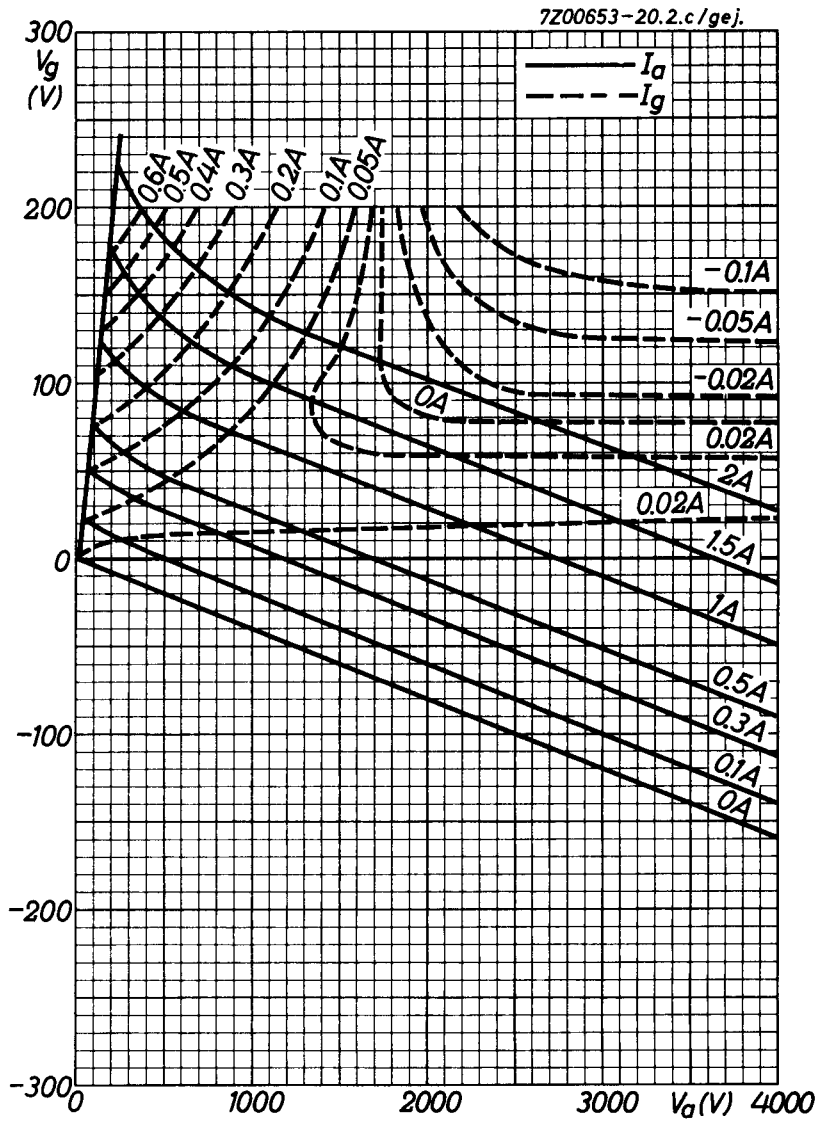


Fig. 5 Constant current characteristics.

PHILIPS

Data handbook



**Electronic
components
and materials**

TB3/750

page	sheet	date
1	49	1988.02
2	50	1988.02
3	51	1988.02
4	52	1988.02
5	53	1988.02
6	54	1988.02
7	55	1988.02
8	56	1988.02
9	57	1988.02
10	58	1988.02
11	FP	2000..09.14