

# DATA SHEET

**A80EFF002X**

**'Black Line S' colour picture tube**

Product specification  
Supersedes data of 1997 Jun 27  
File under display components, DC01

1998 Aug 20

**‘Black Line S’ colour picture tube****A80EFF002X****FEATURES**

- ‘Flatter’ and ‘squarer’ screen
- In-line, IFL, ART (Aberration Reducing Triode) gun with quadrupole cathode lens
- INVAR mask with corner suspension
- BLACK MATRIX technology
- Pigmented phosphors
  - Cd-free green
  - Deep red
- Quick-heating low-power impregnated cathodes
- Soft-flash
- Slotted shadow mask optimized for minimum moiré at 525 and 625 line systems
- Internal magnetic shield
- Application for northern hemisphere
- Internal multipole
- Reinforced envelope for re-entrant mounting.

**QUICK REFERENCE DATA**

PARAMETER	TYP.	UNIT
Deflection angle	110	deg
Useful screen diagonal	80	cm
Overall length	50	cm
Glass transmission	36.7	%
Neck diameter	29.1	mm
Heater voltage	6.15	V
Heater current	315	mA
Anode voltage	27.5	kV
Focus voltage	28% of anode voltage	

The logo for 'Black Line S' is written in a stylized, cursive script. The words 'Black Line' are in black, and the 'S' is in a lighter grey color.

## 'Black Line S' colour picture tube

A80EFF002X

## ELECTRICAL DATA

SYMBOL	PARAMETER	MIN.	TYP.	UNIT
<b>Capacitances</b>				
$C_{a(m+m')}$	anode to external conductive coating, including rimband	3000	–	pF
$C_{am'}$	anode to metal rimband	–	300	pF
$C_k$	cathodes of all guns (connected in parallel) to all other electrodes	–	15	pF
$C_{kR}, C_{kG}, C_{kB}$	cathode of any gun to all other electrodes	–	5	pF
$C_{g1}$	grid 1 to all other electrodes	–	17	pF
$C_{g3}$	grid 3 (focus electrode) to all other electrodes	–	6	pF
<b>Heating</b>				
$V_f$	heater voltage: indirect AC (preferably mains or line frequency) or DC	–	6.15	V
$I_f$	heater current	–	315	mA
<b>Resistance</b>				
$R_{rim}$	resistance between rimband and external conductive coating	50	–	MΩ

## ELECTRO-OPTICAL DATA

PARAMETER	VALUE
Electron gun system	unitized triple-aperture electrodes; aberration reducing triode; impregnated cathodes
Focus method	electrostatic
Main lens	IFL (Integrated Focus Lens)
Deflection method	magnetic
Deflection angles	
diagonal	110°
horizontal	97°
vertical	77°

## ‘Black Line S’ colour picture tube

A80EFF002X

**OPTICAL DATA**

PARAMETER	VALUE
Screen	metal-backed vertical phosphor stripes; phosphor lines follow glass contour
Matrix	black opaque material, PVP technology
Screen finish	high gloss
Useful screen dimensions	
diagonal	800.9 mm
horizontal axis	647.2 mm
vertical axis	489.3 mm
area	≈3 150 cm <sup>2</sup>
Phosphor alignment	see Fig.1
Phosphors	
red	pigmented europium activated rare earth
green	Cd-free sulphide type
blue	pigmented sulphide type
Persistence	medium short
Centre-to-centre distance of identical colour phosphor stripes	≈0.9 mm
Light transmission of face glass at centre of screen	36.7%
Luminance at centre of screen; note 1	60 cd/m <sup>2</sup>

**Note**


1. Tube settings adjusted to produce white D ( $x = 0.313$ ,  $y = 0.329$ ), focused raster, current density  $0.4 \mu\text{A}/\text{cm}^2$ .

**Colour coordinates**

COLOUR	x	y
Red	0.630	0.330
Green	0.295	0.595
Blue	0.155	0.065

‘Black Line S’ colour picture tube

A80EFF002X

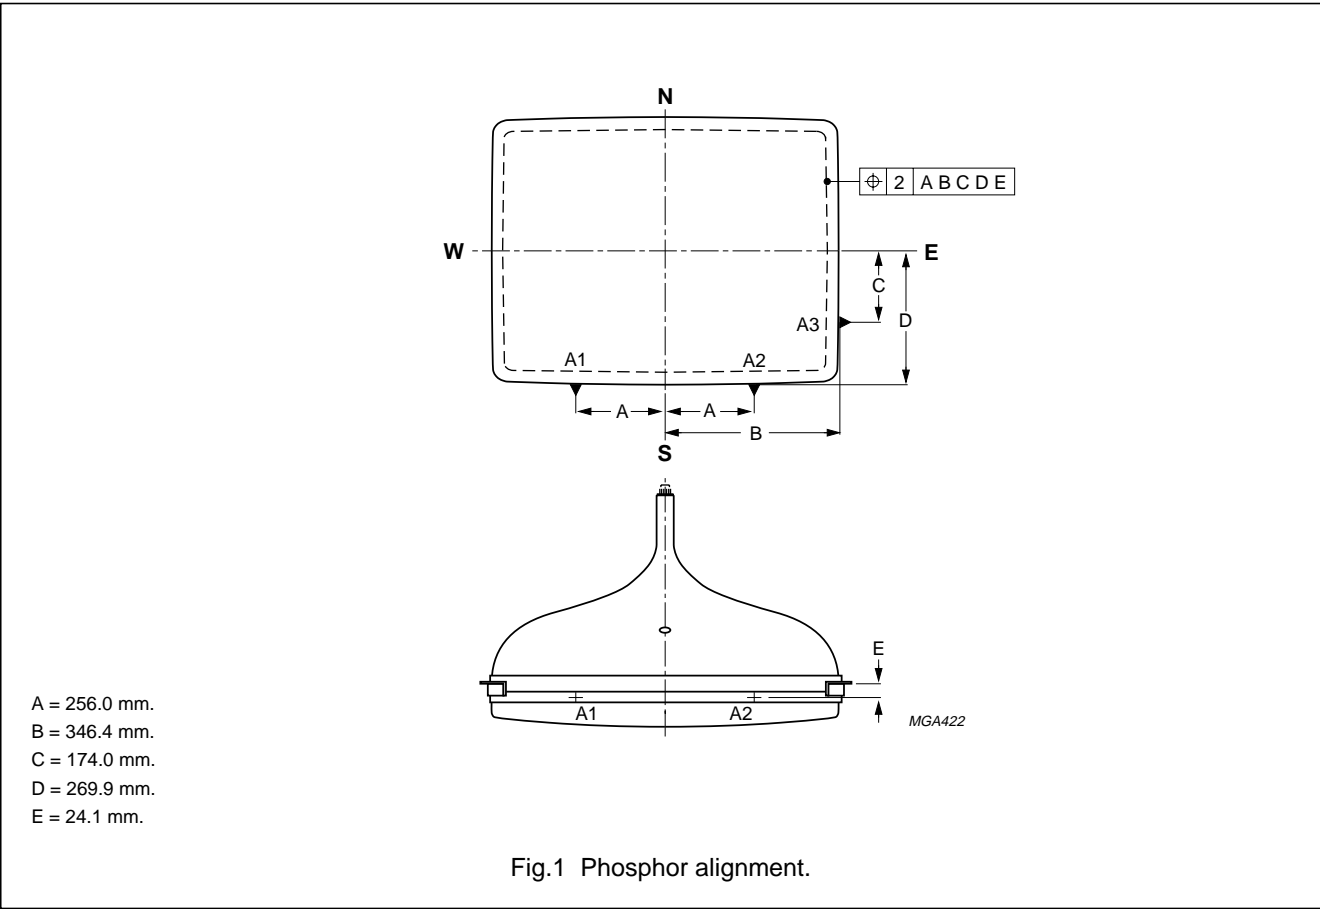


MECHANICAL DATA

See Figs 2 to 12.

PARAMETER	VALUE
Overall length	498 ±6 mm
Neck diameter	29.1 +1.4/-0.7 mm
Base	Base JEDEC B10-277
Anode contact	small cavity contact JEDEC J1-21; IEC 67-III-2
Mounting position	anode contact on top
Implosion protection	shrunk-on rimband
Mass including deflection unit	≈40.5 kg

## 'Black Line S' colour picture tube

A80EFF002X

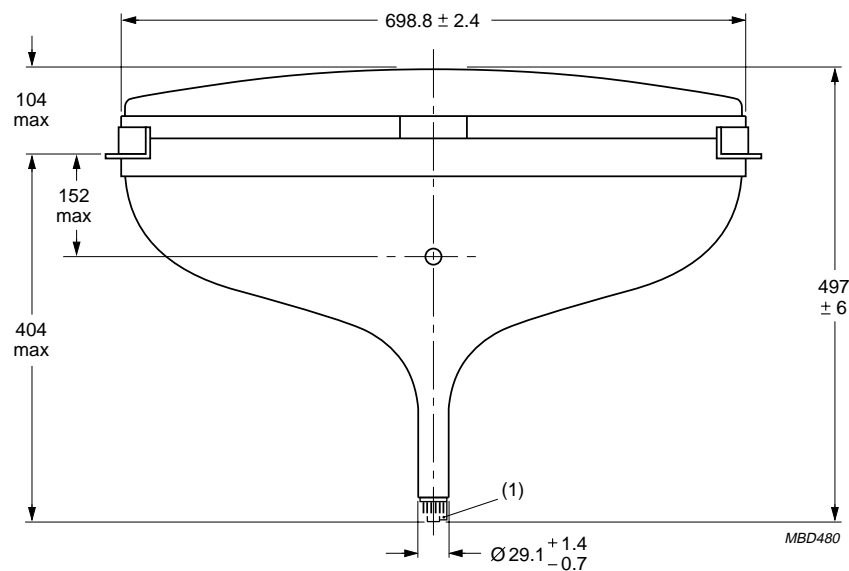


Dimensions in mm.

- (1) The socket for this base should not be rigidly mounted; it should have flexible leads and be allowed to move freely. After mounting the tube in the cabinet, note that the position of the base can fall within a circle having a diameter of max. 55 mm concentric with an imaginary tube axis.

Fig.2 Tube dimensions; top view.

## 'Black Line S' colour picture tube

A80EFF002X

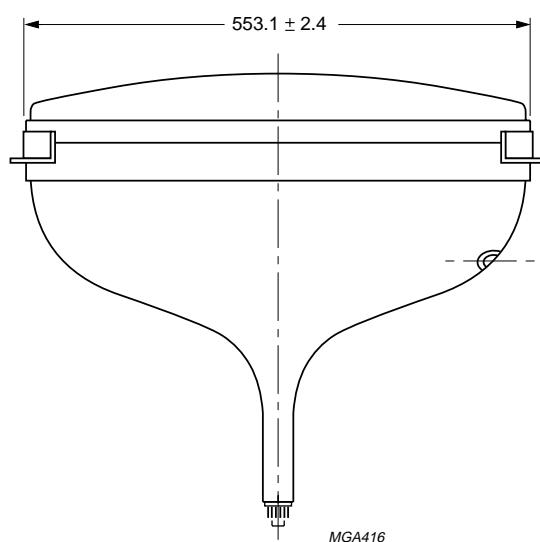


Dimensions in mm.

Fig.3 Tube dimensions; side view.

## 'Black Line S' colour picture tube

A80EFF002X

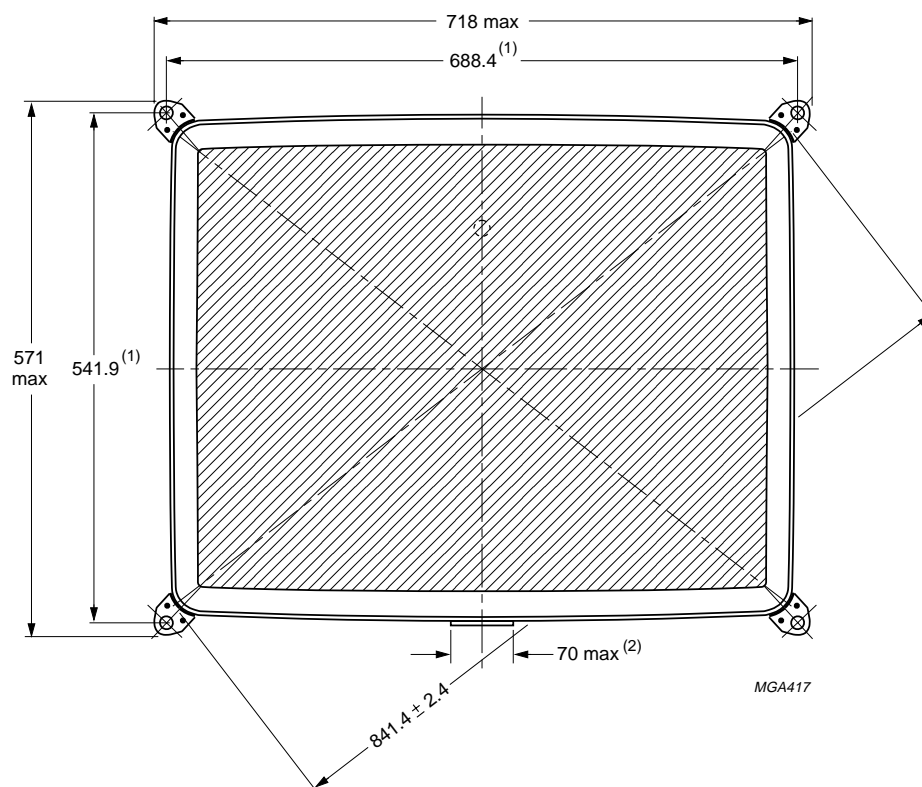

Dimensions in mm.


- (1) The position of the mounting screw in the cabinet must be within a circle of 10.5 mm drawn around the true geometrical positions (i.e. the corners of a rectangle 688.4 mm × 541.9 mm).
- (2) Location of fishplate.

Fig.4 Tube dimensions; front view.



‘Black Line S’ colour picture tube

A80EFF002X

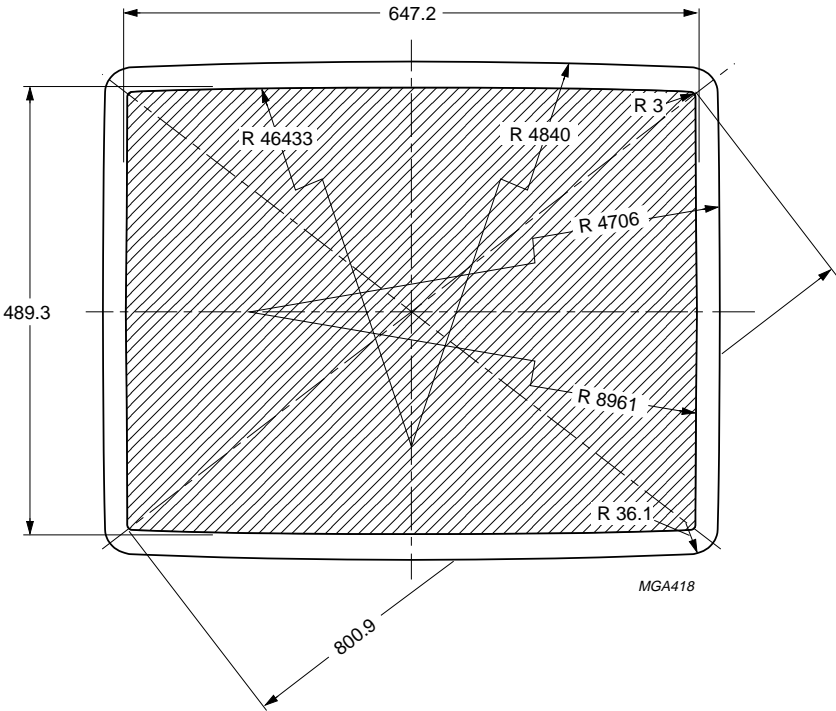


Dimensions in mm.

Fig.5 Phosphor and screen dimensions.

## 'Black Line S' colour picture tube

A80EFF002X

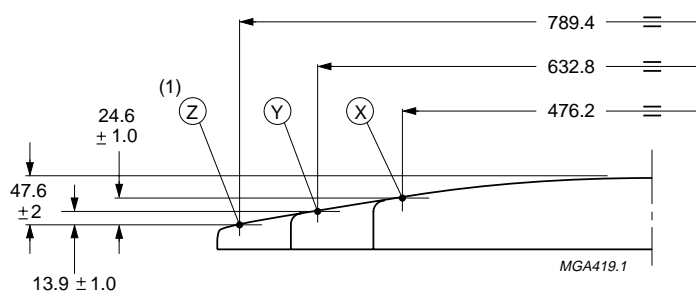

Dimensions in mm.

(1) Coordinates of Z-point:  $X = 315.76$ ,  $Y = 236.82$ .

The X, Y and Z reference points are located on the outside surface of the face plate on the minor, major and diagonal screen axis respectively.

The distance Z from any point on the screen to the centre can be calculated using the following formula:

$$R = \sqrt{X^2 + Y^2}$$

$$A = \tan^{-1}\left(\frac{Y}{X}\right)$$

$$P = \sum_{i=0}^5 \{B_i \times \cos(2 \times i \times A)\}$$

$$Q = \left[ \sum_{i=0}^5 \{K_i \times \cos(2 \times i \times A)\} \right]^{-1}$$

$$Z = \left\{ \frac{\sqrt{Q^2 + R^2} - Q}{P} \right\}$$

$$B_0 = 1.5212766$$

$$B_1 = 0.4812777$$

$$B_2 = -1.3812790$$

$$B_3 = -0.3712766$$

$$B_4 = 2.3713430 \times 10^{-6}$$

$$B_5 = -1.0992640 \times 10^{-6}$$

$$K_0 = 1.0898877 \times 10^{-3}$$

$$K_1 = 3.0225573 \times 10^{-4}$$

$$K_2 = -1.0012023 \times 10^{-3}$$

$$K_3 = -2.3277834 \times 10^{-4}$$

$$K_4 = 7.6873502 \times 10^{-6}$$

$$K_5 = 2.6051020 \times 10^{-6}$$

Fig.6 Screen reference points.

## ‘Black Line S’ colour picture tube

A80EFF002X

Sagittal heights with reference to screen centre at edge of the nominal useful screen


NOMINAL USEFUL SCREEN (NUS)			3 mm INSIDE NUS			10 mm OUTSIDE NUS		
COORDINATES		SAGITTAL HEIGHT (mm)	COORDINATES		SAGITTAL HEIGHT (mm)	COORDINATES		SAGITTAL HEIGHT (mm)
X (mm)	Y (mm)		X (mm)	Y (mm)		X (mm)	Y (mm)	
0.0	0.0	48.9	0.0	0.0	48.3	0.0	0.0	52.2
0.0 <sup>(1)</sup>	244.5	24.7	0.0	241.5	24.7	0.0	254.5	25.9
10.0	244.5	24.7	10.0	241.5	24.7	10.0	254.5	25.9
20.0	244.5	24.6	20.0	241.5	24.6	20.0	254.5	25.9
40.0	244.4	24.4	40.0	241.4	24.3	40.0	254.4	25.6
60.0	244.4	23.9	60.0	241.4	23.9	60.0	254.4	25.1
80.0	244.4	23.2	80.0	241.4	23.2	80.0	254.4	24.5
100.0	244.4	22.3	100.0	241.4	22.3	100.0	254.4	23.6
120.0	244.3	21.2	120.0	241.3	21.2	120.0	254.3	22.5
140.0	244.3	19.9	140.0	241.3	19.9	140.0	254.3	21.2
160.0	244.2	18.5	160.0	241.2	18.4	160.0	254.2	19.8
180.0	244.1	16.9	180.0	241.1	16.8	180.0	254.1	18.2
200.0	244.0	15.1	200.0	241.0	15.0	200.0	254.0	16.4
220.0	243.9	13.1	220.0	240.9	13.0	220.0	253.9	14.5
240.0	243.8	10.9	240.0	240.8	10.8	240.0	253.8	12.4
260.0	243.7	8.5	260.0	240.7	8.3	260.0	253.7	10.1
280.0	243.6	5.8	280.0	240.6	5.7	280.0	253.6	7.5
300.0	243.5	2.9	300.0	240.5	2.7	300.0	253.5	4.7
317.3	243.4	0.2	310.0	240.4	1.2	320.0	253.4	1.6
319.7 <sup>(2)</sup>	242.2	0.0	317.3	240.4	0.0	329.9	253.3	0.0
320.3	240.0	0.2	317.3	240.0	0.1	330.3	240.0	1.7
320.6	230.0	1.4	317.6	230.0	1.3	330.6	230.0	2.9
320.8	220.0	2.6	317.8	220.0	2.5	330.8	220.0	4.0
321.3	200.0	4.6	318.3	200.0	4.6	331.3	200.0	6.0
321.7	180.0	6.4	318.7	180.0	6.3	331.7	180.0	7.7
322.1	160.0	7.9	319.1	160.0	7.8	332.1	160.0	9.1
322.4	140.0	9.1	319.4	140.0	9.1	332.4	140.0	10.3
322.7	120.0	10.2	319.7	120.0	10.2	332.7	120.0	11.3
322.9	100.0	11.2	319.9	100.0	11.2	332.9	100.0	12.3
323.1	80.0	12.0	320.1	80.0	12.0	333.1	80.0	13.1
323.3	60.0	12.8	320.3	60.0	12.8	333.3	60.0	13.8
323.4	40.0	13.3	320.4	40.0	13.3	333.4	40.0	14.4
323.5	20.0	13.6	320.5	20.0	13.6	333.5	20.0	14.7
323.5	10.0	13.7	320.5	10.0	13.7	333.5	10.0	14.7
323.5 <sup>(3)</sup>	0.0	13.7	320.5	0.0	13.7	333.5	0.0	14.7

## Notes

1. End of short axis.
2. End of diagonal axis.
3. End of long axis.

## 'Black Line S' colour picture tube


A80EFF002X

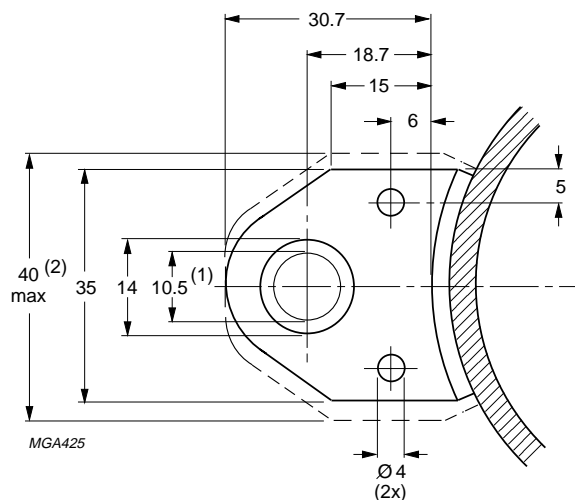

Dimensions in mm.

- (1) The position of the mounting screw in the cabinet must be within a circle of 10.5 mm diameter drawn around the true geometrical positions, i.e. the corners of a rectangle of 688.4 mm × 541.9 mm.
- (2) Minimum space to be reserved for mounting lug.

Fig.7 Lug dimensions.

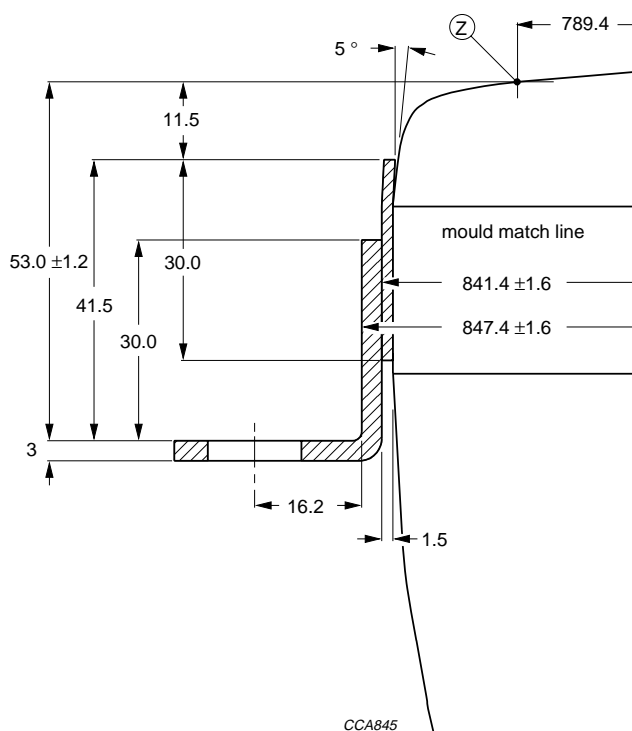


Dimensions in mm.

The displacement of any lug with respect to the plane through the three other lugs is max. 1.0 mm.

Fig.8 Lug position.


‘Black Line S’ colour picture tube

A80EFF002X

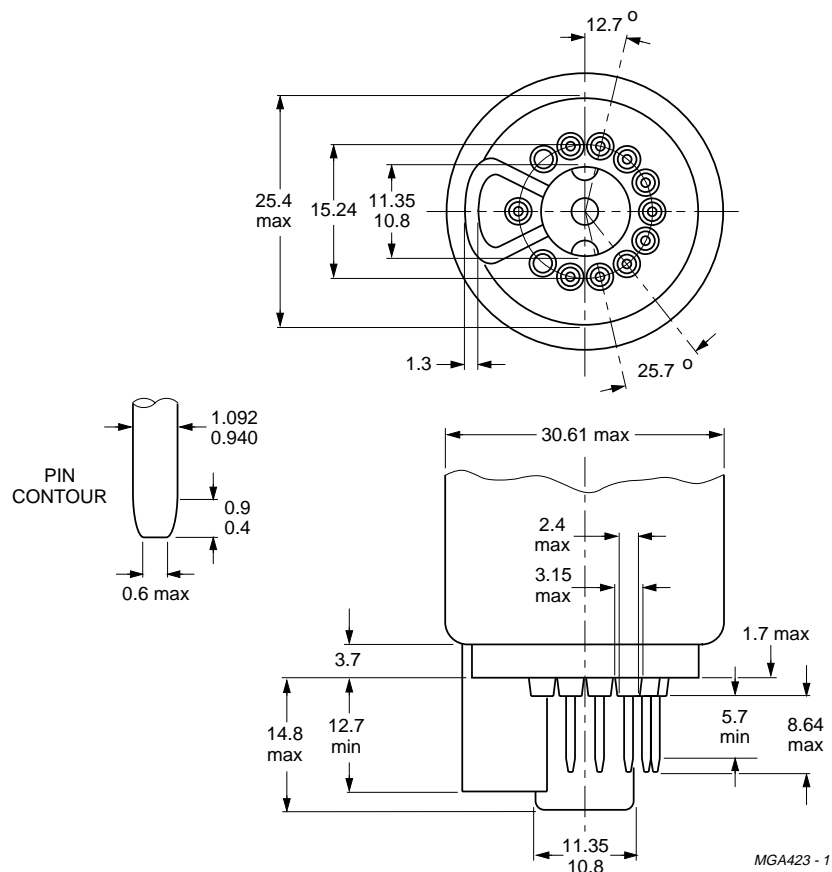

Dimensions in mm.

Fig.9 Base JEDEC B10-277.

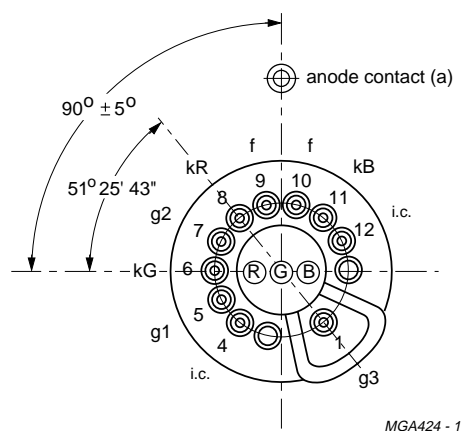

i.c. = internally connected and not to be used.

Fig.10 Pin arrangement.

Remarks: to Figs 9 and 10.


The socket for this base should not be rigidly mounted, it should have flexible leads and be allowed to move freely. After mounting the tube in the cabinet, note that the position of the base can fall within a circle having a diameter of max. 55 mm concentric with an imaginary tube axis.

The mass of the mounting socket assembly should not exceed 150 g.


Maximum permissible torque on the tube neck is 0.04 Nm.

‘Black Line S’ colour picture tube

A80EFF002X

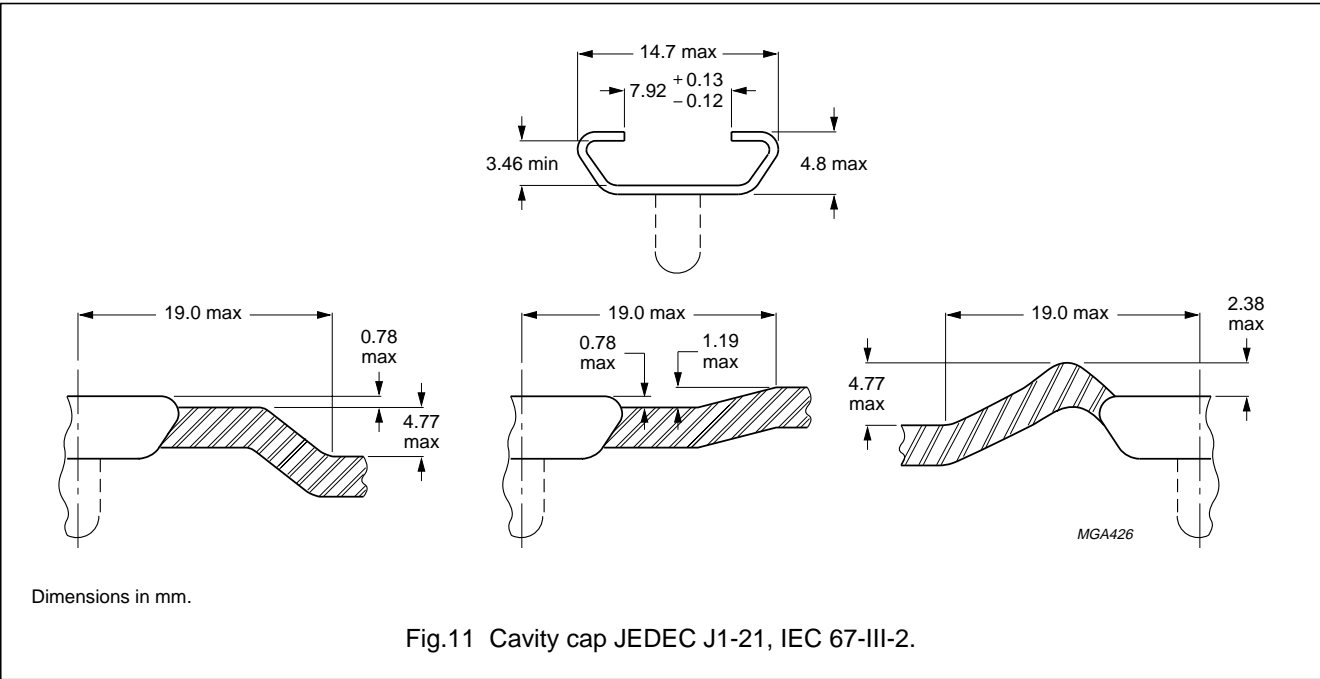

Cone contour

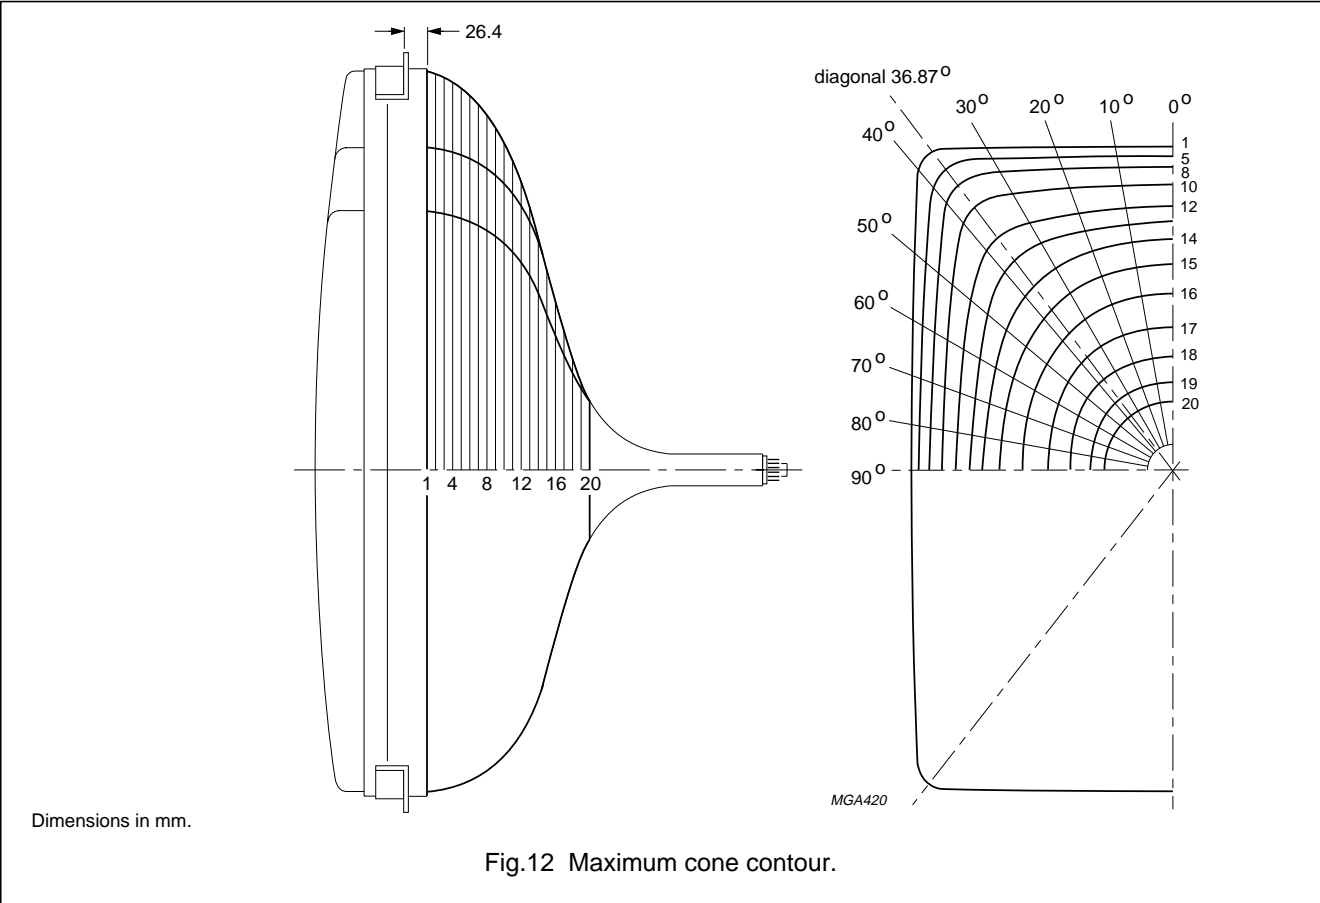

**'Black Line S' colour picture tube****A80EFF002X****Cone contour data**

SECTION	NOMINAL DISTANCE FROM SECTION 1 (mm)	MAXIMUM DISTANCE FROM TUBE AXIS (mm)										
		0°	10°	20°	30°	36.87°	40°	50°	60°	70°	80°	90°
1	0	345.9	350.9	366.4	394.9	417.6	409.2	349.6	312.1	289.2	276.6	272.7
2	10.0	344.6	349.6	365.3	393.9	416.3	407.7	348.8	311.3	288.2	275.6	271.6
3	20.0	341.3	346.4	362.1	390.6	412.8	404.2	346.4	308.9	285.8	273.3	269.3
4	30.0	336.9	341.8	357.3	385.2	406.6	398.6	342.1	305.2	282.5	270.2	266.2
5	40.0	332.0	336.8	351.8	378.7	397.7	390.4	336.9	301.0	278.9	266.8	262.9
6	50.0	326.6	311.3	345.7	370.8	385.8	379.3	330.6	296.2	274.8	263.1	259.4
7	60.0	320.8	325.2	338.7	361.2	371.5	365.9	323.1	290.6	270.1	258.9	255.2
8	70.0	314.2	318.3	330.4	350.2	356.6	351.6	314.5	284.0	264.5	253.7	250.2
9	80.0	306.5	310.4	321.9	337.9	341.4	336.8	304.9	276.3	257.9	247.6	244.3
10	90.0	297.7	301.3	311.6	324.3	325.7	321.5	294.0	267.8	250.3	240.6	237.4
11	100.0	287.5	290.7	299.6	309.4	309.2	305.4	282.0	258.2	241.9	232.7	229.7
12	110.0	275.3	278.2	285.8	293.0	291.9	288.5	260.9	247.7	232.6	223.9	221.1
13	120.0	261.1	263.6	269.9	275.1	273.6	270.7	254.5	236.1	222.3	214.2	211.6
14	130.0	244.9	247.1	252.2	256.0	254.5	252.2	239.0	223.2	210.8	203.4	201.0
15	140.0	227.2	229.1	233.2	236.1	234.7	232.8	222.1	208.8	197.9	191.2	189.0
16	150.0	208.1	209.6	213.0	215.0	213.7	212.2	203.6	192.6	183.2	177.3	175.3
17	160.0	187.1	188.5	191.1	192.5	191.4	190.1	183.3	174.4	166.5	161.3	159.6
18	170.0	164.0	165.0	167.0	168.0	167.0	166.0	160.7	153.8	147.4	143.1	141.6
19	180.0	137.9	138.7	140.0	140.5	139.7	139.0	135.3	130.4	125.7	122.5	121.2
20	190.0	108.6	109.0	109.7	109.8	109.3	108.8	106.9	104.2	101.5	99.5	98.7
21	200.0	76.3	76.4	76.5	76.5	76.4	76.3	76.0	75.6	75.2	74.9	74.7
22	200.82	73.6	73.6	73.7	73.6	73.6	73.6	73.4	73.2	73.0	72.8	72.7

**HANDLING**


During shipment and handling the tube should not be subjected to accelerations greater than 200 m/s<sup>2</sup> in cone direction and 350 m/s<sup>2</sup> in any other direction.

‘Black Line S’ colour picture tube

A80EFF002X

OPERATING DATA

SYMBOL	PARAMETER	CONDITION	MIN.	TYP.	MAX.	UNIT
V <sub>a</sub>	anode voltage	full screen load	–	27.5	–	kV
V <sub>g3</sub>	grid 3 (focus electrode) voltage	screen centre	7.5	–	8.7	kV
V <sub>g2</sub>	grid 2 voltage		see Fig.13			
V <sub>f</sub>	heater voltage	tube operating	5.7	6.15	6.6	V

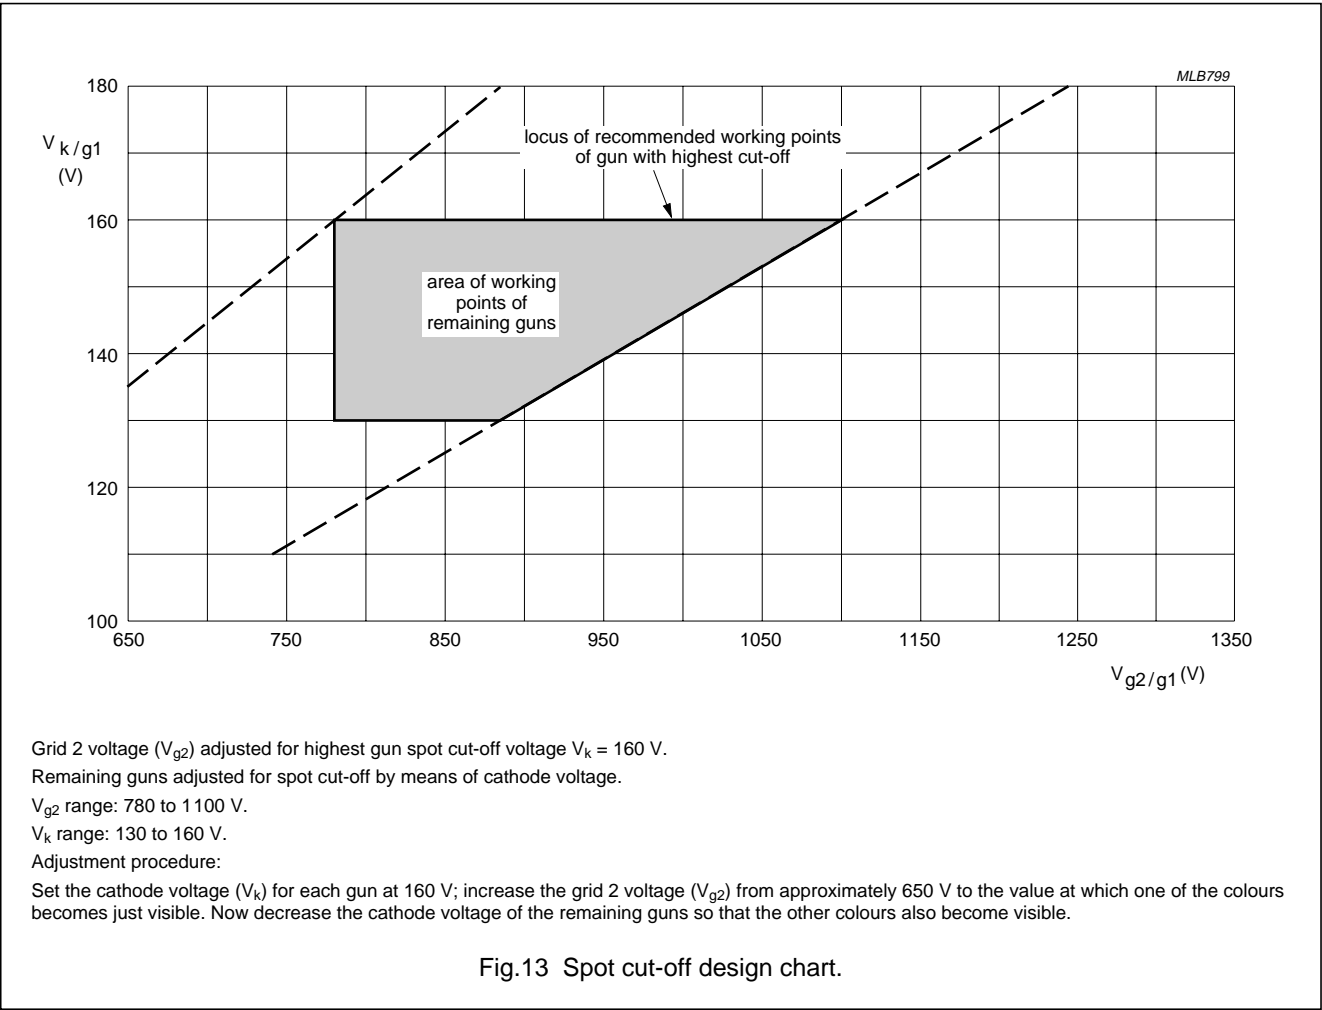



## ‘Black Line S’ colour picture tube

A80EFF002X

**CHASSIS DESIGN VALUES**

The values given are valid for anode voltages between 25 and 33 kV. The voltages are specified with respect to grid 1.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_{g3}$	grid 3 (focus electrode) voltage as a percentage of anode voltage		26	–	29.8	%
$V_{g2}$ and $V_k$	grid 2 voltage and cathode voltage	for visual extinction of focused spot	see Fig.13			
$\Delta V_k$	difference in cut-off voltage between guns in any tube		lowest value >80% of highest value			
$V_f$	heater voltage	at average beam current	5.7	6.15	6.6	V
	video drive characteristics		note 1 and Fig.14			
$I_{g3}$	grid 3 (focus electrode) current		–2	–	+2	$\mu A$
$I_{g2}$	grid 2 current		–2	–	+2	$\mu A$
$I_{g1}$	grid 1 current	under cut-off conditions	–2	–	+2	$\mu A$
$R_{ins}$	insulation resistance	each cathode to grid 1 and heater	50	–	–	M $\Omega$
<b>Anode currents to produce white of 6500 K + 7 MPCD (CIE coordinates: x = 0.313; y = 0.329)</b>						
PERCENTAGE OF THE TOTAL ANODE CURRENT SUPPLIED BY EACH GUN (TYPICAL)						
	red gun		–	41.3	–	%
	green gun		–	34.4	–	%
	blue gun		–	24.3	–	%
RATIO OF ANODE CURRENTS						
	red gun to green gun		0.85	1.20	1.55	
	red gun to blue gun		1.20	1.70	2.20	
	blue gun to green gun		0.40	0.70	1.00	

**Note**

- For optimum picture performance it is recommended that the cathodes are not driven below +1 V.

## 'Black Line S' colour picture tube

A80EFF002X

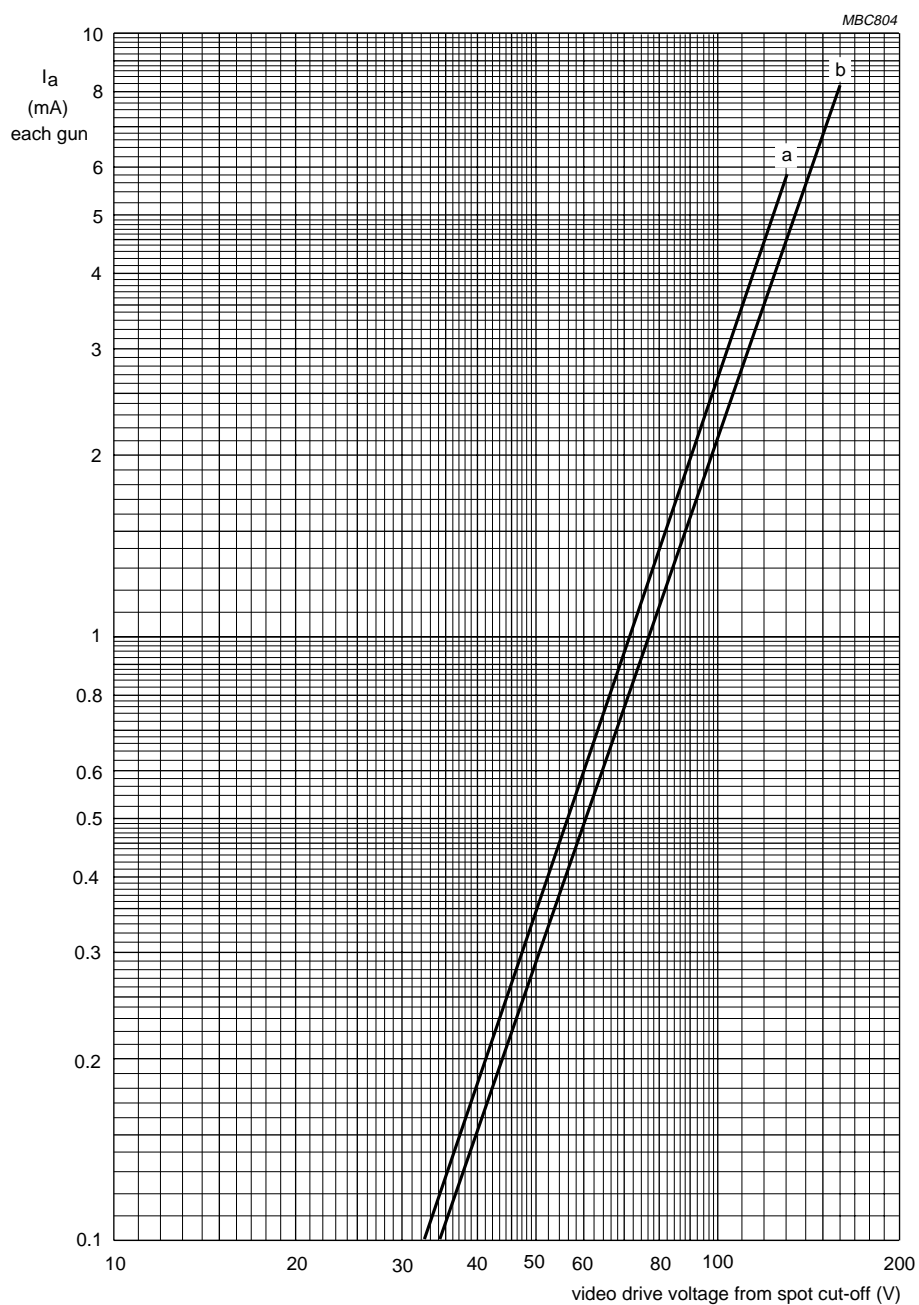
 $V_f = 6.15$  V. $V_a = 27.5$  kV. $V_{g3}$  adjusted for focus. $V_{g2}$  (each gun) adjusted to provide spot cut-off for  $V_k = 130$  V (curve a) and  $V_k = 160$  V (curve b).

Fig.14 Typical cathode drive characteristics.

## ‘Black Line S’ colour picture tube

A80EFF002X

**LIMITING VALUES**

In accordance with the Absolute Maximum Rating System (IEC 134). Voltages are specified with respect to grid 1.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
$V_a$	anode voltage	note 1 and Fig.14	25 <sup>(2)</sup>	33 <sup>(3)</sup>	kV
$I_a$	long-term average anode current for three guns		–	1300	$\mu$ A
	short-term average anode current for three guns		–	1800	$\mu$ A
$V_{g3}$	focus voltage	note 4	–	12	kV
$V_{g2}$	grid 2 voltage	note 5	–	1400	V
$V_f$	heater voltage	note 6	5.7	6.6	V
<b>Cathode voltage</b>					
$V_k$	positive		–	250	V
$V_k$	during switch-off		–	250	V
$V_k$	positive operating cut-off		–	200	V
$V_k$	negative		–	0	V
$V_{kp}$	negative peak		–	–2	V
<b>Cathode to heater voltage</b>					
$V_{kf}$	positive		–	250	V
$V_{kfp}$	positive peak		–	300	V
$V_{kf}$	negative		–	0	V
$V_{kfp}$	negative peak		–	–50	V
<b>Circuit limiting values</b>					
$R_{g3}$	grid 3 circuit resistance		–	70	M $\Omega$
$R_{g2}$	grid 2 circuit resistance		–	7	M $\Omega$
$R_{g1-k}$	grid 1 to cathode circuit resistance		–	750	k $\Omega$

**Notes**

1. During adjustment on the production line this value is likely to be surpassed considerably. It is therefore strongly recommended to first make the necessary adjustments for normal operation without the picture tube.
2. Operation of the tube at lower voltages impairs the luminance and resolution and could impair convergence.
3. This value is an absolute maximum.
4. During flash-over maximum 20 kV is allowed (see Chapter “Flashover protection”).
5. During adjustment on the production line a maximum value of 1500 V is allowed.
6. For maximum cathode life and optimum performance it is recommended that the heater supply is designed for 6.15 V at average beam current, for most applications this equals 6.3 V at zero beam current. **The heater supply source impedance must not be less than 2  $\Omega$ .**

**BEAM CENTRING**

Maximum centring error in any direction is 5 mm.

## 'Black Line S' colour picture tube

A80EFF002X

### FLASHOVER PROTECTION

The high voltages used with this tube (absolute max. 33.0 kV) may produce internal flashovers. Soft-flash technology limits these flashover currents to approximately 60 A offering higher reliability, optimum circuit protection and component savings.

Primary protective circuitry using properly grounded spark gaps and series isolation resistors (preferably carbon composition) is still necessary

to prevent tube damage. The spark gaps should be connected to all picture tube electrodes (except the tube heaters) at the tube socket in accordance with Fig.15. No other connections between the outer conductive coating and the chassis are permissible. The spark gaps should be designed for a maximum breakdown voltage at the focus electrode ( $g_3$ ) of approximately 19 to 20 kV and at the other electrodes of 1.5 to 2 kV at the lowest operating atmospheric pressure.

The values of the series isolation resistors should be as high as possible (min. 1.5 k $\Omega$ ) without causing deterioration of circuit performance. The resistors should be able to withstand an instantaneous surge of 20 kV for the focus circuit and 12 kV for the remaining circuits without arcing.

Additional information is available on request.

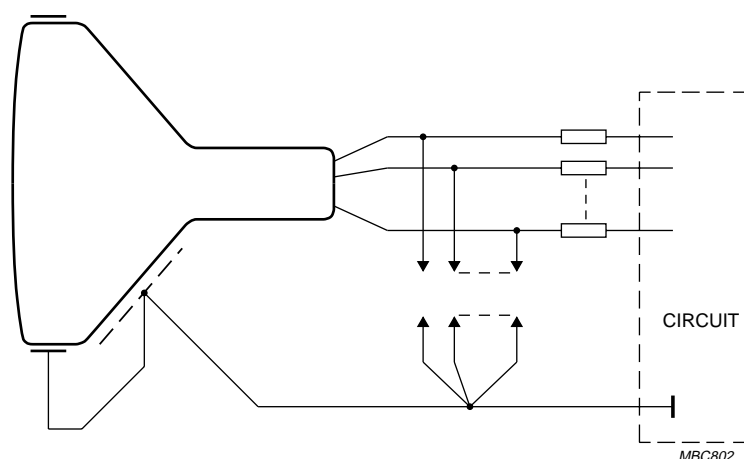


Fig.15 Flashover protection circuit.

## 'Black Line S' colour picture tube

A80EFF002X

**X-RADIATION**

Maximum anode voltage at which the X-radiation emitted will not exceed 0.5 mR/h at an anode current of 300  $\mu$ A.

PARAMETER	VALUE
Entire tube; note 1	46 kV

**Note**

1. This rating applies only if the anode connector used by the set maker provides the necessary attenuation to reduce the X-radiation from the anode contact by a factor equal to the difference between the anode button iso-exposure-rate limit curve and the iso-exposure limit curve for the entire tube.

**WARNING**

If the value for the tube face only is used as design criteria, adequate shielding must be provided in the TV receiver for the anode contact and/or certain portions of the tube funnel and panel sidewalls to ensure that the X-radiation from the TV receiver is attenuated to a value equal to or lower than that specified for the face of the tube.

The X-radiation emitted from this picture tube, as measured in accordance with the procedure of "JEDEC Publications No.64D" will not exceed 0.5 mR/h throughout the useful life of the tube when operated within the design-maximum ratings.

The tube should not be operated beyond its design-maximum ratings stated above, but its X-radiation will not exceed 0.5 mR/h for anode voltage and current combinations given by the iso-exposure-rate limit characteristics as shown in Fig.16.

Operation above the values shown by the curve may result in failure of the TV receiver to comply with the "Federal Performance Standard of the U.S. for Television Receivers, Section 1020.10 of Part 1020 of Title 21, Code of Federal Regulation (PL90-602)" as published in "Federal Register Volume 38, No. 198 Monday, October 15, 1973".

Maximum X-radiation as a function of anode voltage at 300  $\mu$ A current is shown by Fig.17. X-radiation at a constant anode voltage varies linearly with anode current.

**WARNING**

The cathode ray tube is intrinsically safe in accordance with "Appendix III Röntgenverordnung".

Eigensichere Kathodenstrahlröhre nach "Anlage III Röntgenverordnung".

‘Black Line S’ colour picture tube

A80EFF002X

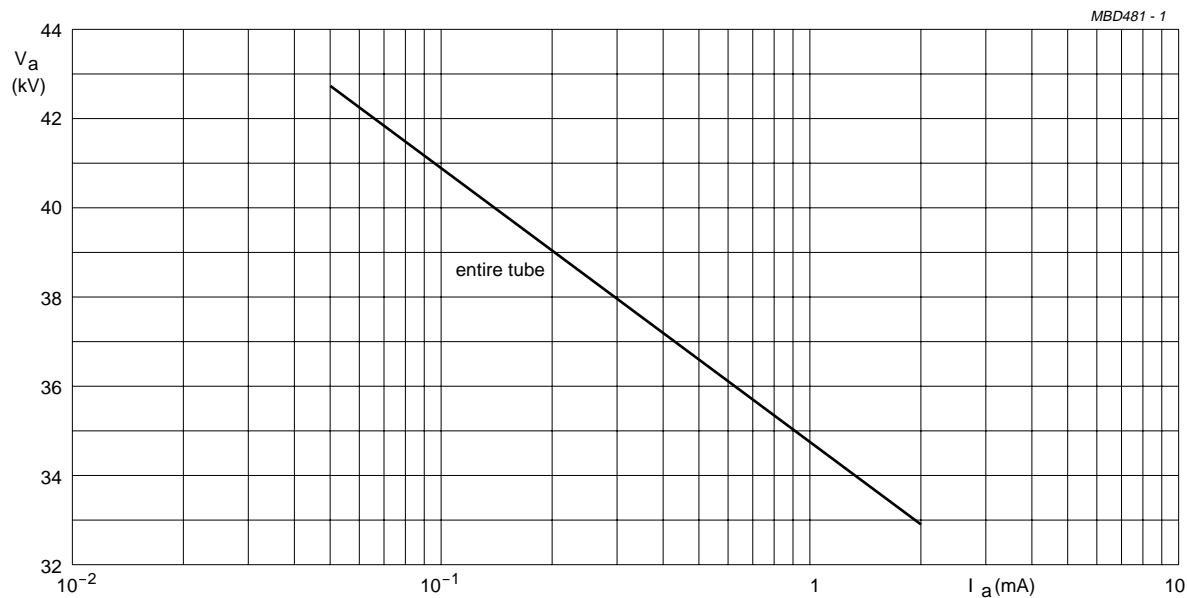


Fig.16 0.5 mR/h iso-exposure-rate limit curve.


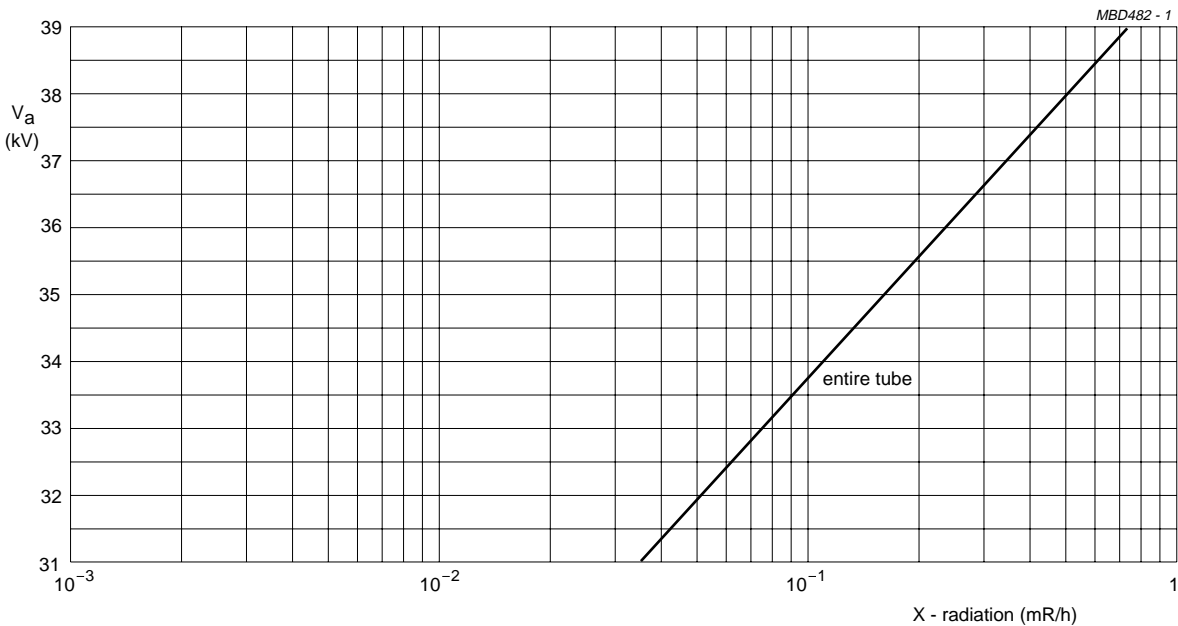


Fig.17 X-radiation limit curve at a constant anode current of 300  $\mu$ A.

‘Black Line S’ colour picture tube

A80EFF002X

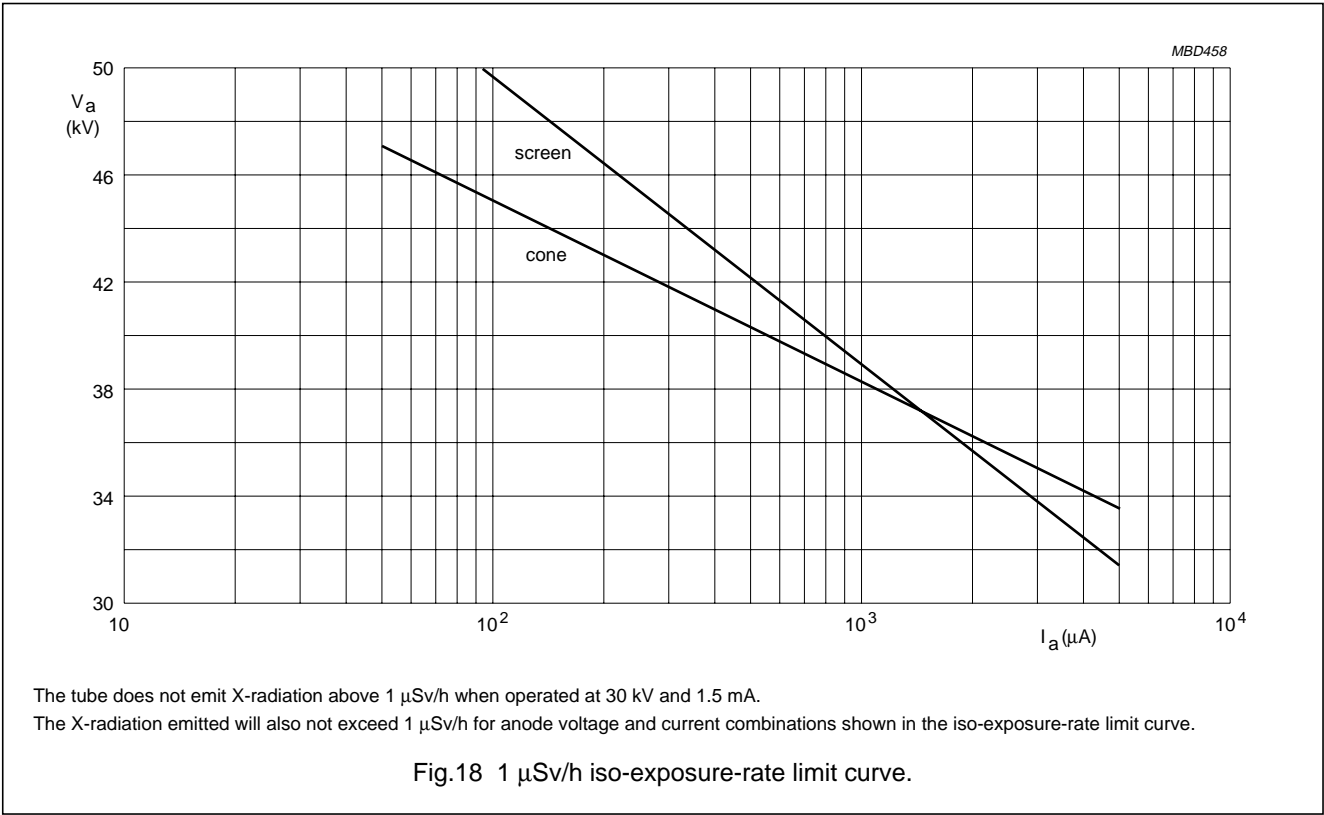

‘Black Line S’ colour picture tube

A80EFF002X

DEGAUSSING

The picture tube is provided with an internal magnetic shield. This shield and the shadow mask with its suspension system may be provided with an automatic degaussing system, consisting of a twisted-loop coil mounted on the cone of the picture tube.

For proper degaussing an initial peak magnetomotive force (MMF) of 500 ampere-turns is required in the coil. This MMF must be gradually decreased (maximum 20% per half period) by appropriate circuitry. At an initial peak MMF of 700 ampere-turns or more, the MMF has to be gradually decreased with a maximum 25% per half period. In the steady state, no significant peak-to-peak MMF should remain in the coils ( $\leq 0.2$  ampere-turns). Switch-off is permitted at a peak  $MMF \leq 8$  ampere-turns.

To prevent beam landing disturbance by horizontal frequency currents induced in the degaussing coil, this coil should be shunted by a capacitor of sufficiently high value.



If single-phase power rectification is employed in the TV circuitry, provision should be included to prevent asymmetric distortion of the AC voltage applied to the degaussing circuit due to high DC inrush currents. In principle degaussing should be carried out during the ‘off’ scanning

period (especially the vertical scanning should be ‘off’). If degaussing is attempted during ‘on’ scanning conditions, beam register of the tube may be affected.

An example of a degaussing circuit and coil data is given in Fig.17 and Table “Degaussing coil data”.

Degaussing coil data

PARAMETER	TYP.	UNIT
Circumference	365	cm
Number of turns	105	
Copper wire diameter	0.45	mm
Resistance	41.0	$\Omega$
PTC thermistor	2322 662 96626	

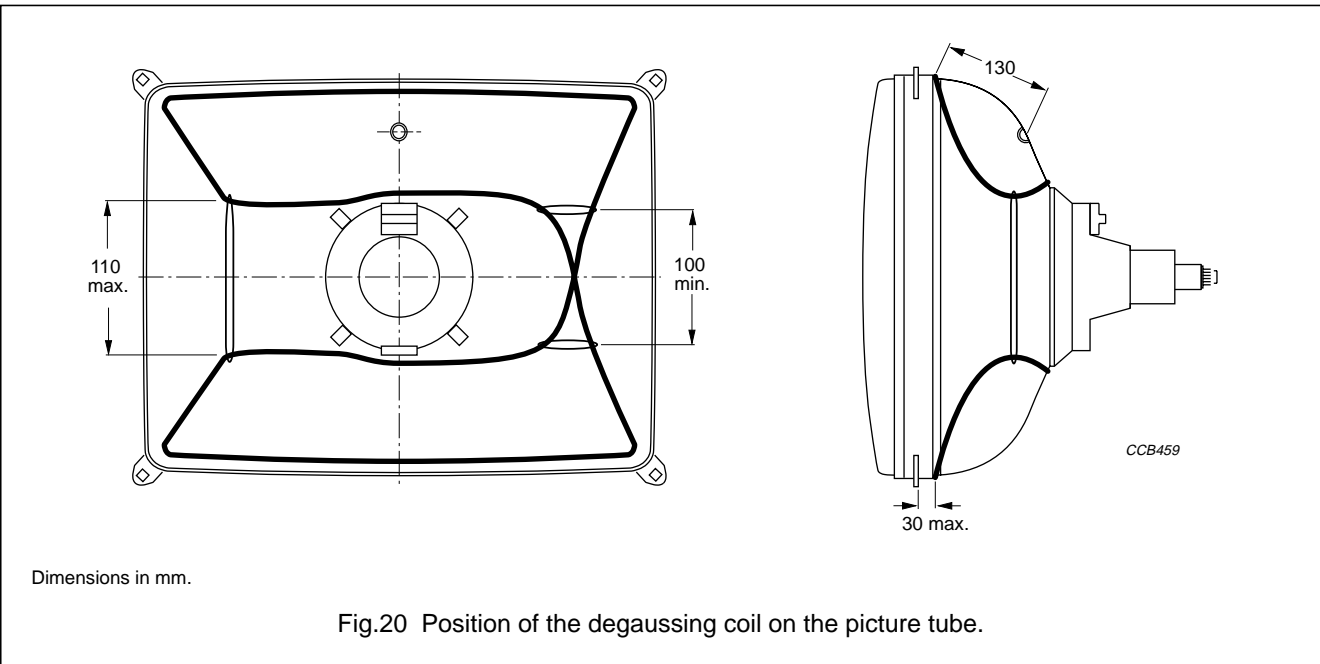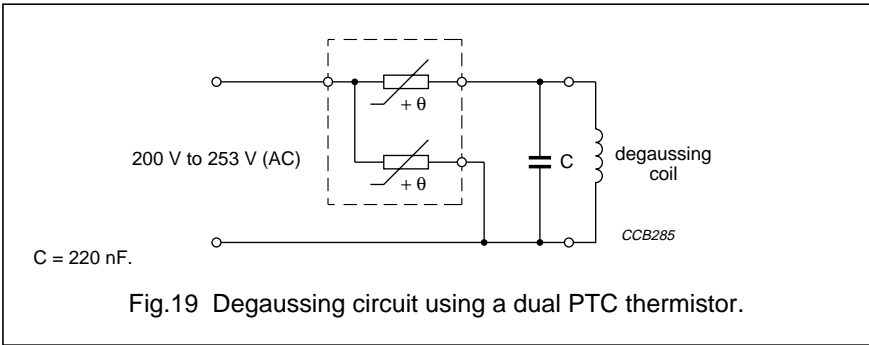



---

**‘Black Line S’ colour picture tube****A80EFF002X**

---

**DEFINITIONS**

<b>Data sheet status</b>	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
<b>Limiting values</b>	
Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	

**LIFE SUPPORT APPLICATIONS**

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.

‘Black Line S’ colour picture tube

A80EFF002X

---

**NOTES**

---

‘Black Line S’ colour picture tube

A80EFF002X

---

**NOTES**

# ***Philips Components – a worldwide company***

**Australia:** Philips Components Pty Ltd., NORTH RYDE,  
Tel. (02) 9805 4455, Fax. (02) 9805 4466.

**Austria:** Österreichische Philips Industrie GmbH, WIEN,  
Tel. (01) 601 01 12 41, Fax. (01) 60 101 12 11.

**Belarus:** Philips Office Belarus, MINSK,  
Tel. (5172) 200 924/733, Fax. (5172) 200 773.

**Benelux:** Philips Nederland B.V., EINDHOVEN, NL,  
Tel. (+31 40) 2783 749, Fax. (+31 40) 2788 399.

**Brazil:** Philips Components, SÃO PAULO,  
Tel. (011) 821 2333, Fax. (011) 829 1849.

**Canada:** Philips Electronics Ltd., SCARBOROUGH,  
Tel. (0416) 292 5161, Fax. (0416) 754 6248.

**China:** Philips Company, SHANGHAI,  
Tel. (021) 6354 1088, Fax. (021) 6354 1060.

**Denmark:** Philips Components A/S, COPENHAGEN S,  
Tel. (32) 883 333, Fax. (31) 571 949.

**Finland:** Philips Components, ESPOO,  
Tel. (0) 9 615 800, Fax. (0) 9 615 80510.

**France:** Philips Composants, SURESNES,  
Tel. (01) 4099 6161, Fax. (01) 4099 6493.

**Germany:** Philips Components GmbH, HAMBURG,  
Tel. (040) 2489-0, Fax. (040) 2489 1400.

**Greece:** Philips Hellas S.A., TAVROS,  
Tel. (01) 4894 339/(01) 4894 239, Fax. (01) 4814 240.

**Hong Kong:** Philips Hong Kong, KOWLOON,  
Tel. 2784 3000, Fax. 2784 3003.

**India:** Philips India Ltd., MUMBAI,  
Tel. (022) 4930 311, Fax. (022) 4930 966/4950 304.

**Indonesia:** P.T. Philips Development Corp., JAKARTA,  
Tel. (021) 794 0040, Fax. (021) 794 0080.

**Ireland:** Philips Electronics (Ireland) Ltd., DUBLIN,  
Tel. (01) 76 40 203, Fax. (01) 76 40 210.

**Israel:** Rapac Electronics Ltd., TEL AVIV,  
Tel. (03) 6450 444, Fax. (03) 6491 007.

**Italy:** Philips Components S.r.l., MILANO,  
Tel. (02) 6752 2531, Fax. (02) 6752 2557.

**Japan:** Philips Japan Ltd., TOKYO,  
Tel. (0) 3 3740 5135, Fax. (0) 3 3740 5035.

**Korea (Republic of):** Philips Electronics (Korea) Ltd., SEOUL,  
Tel. (02) 709 -1472, Fax. (02) 709 1480.

**Malaysia:** Philips Malaysia SDN Berhad,  
Components Division, PULAU PINANG,  
Tel. (03) 750 5213, Fax. (03) 757 4880.

**Mexico:** Philips Components, EL PASO, U.S.A.,  
Tel. (915) 772 4020, Fax. (915) 772 4332.

**New Zealand:** Philips New Zealand Ltd., AUCKLAND,  
Tel. (09) 815 4000, Fax. (09) 849 7811.

**Norway:** Norsk A/S Philips, OSLO,  
Tel. (22) 74 8000, Fax. (22) 74 8341.

**Pakistan:** Philips Electrical Industries of Pakistan Ltd., KARACHI,  
Tel. (021) 587 4641-49, Fax. (021) 577 035/587 4546.

**Philippines:** Philips Semiconductors Philippines Inc.,  
METRO MANILA, Tel. (02) 816 6345, Fax. (02) 817 3474.

**Poland:** Philips Poland Sp. z.o.o., WARSZAWA,  
Tel. (022) 612 2594, Fax. (022) 612 2327.

**Portugal:** Philips Portuguesa S.A.,  
Philips Components: LINDA-A-VELHA,  
Tel. (01) 416 3160/416 3333, Fax. (01) 416 3174/416 3366.

**Russia:** Philips Russia, MOSCOW,  
Tel. (095) 755 6918, Fax. (095) 755 6919.

**Singapore:** Philips Singapore Pte Ltd., SINGAPORE,  
Tel. 350 2000, Fax. 355 1758.

**South Africa:** S.A. Philips Pty Ltd., JOHANNESBURG,  
Tel. (011) 470 5911, Fax. (011) 470 5494.

**Spain:** Philips Components, BARCELONA,  
Tel. (93) 301 63 12, Fax. (93) 301 42 43.

**Sweden:** Philips Components AB, STOCKHOLM,  
Tel. (+46) 8 5985 2000, Fax. (+46) 8 5985 2745.

**Switzerland:** Philips Components AG, ZÜRICH,  
Tel. (01) 488 22 11, Fax. (01) 481 77 30.

**Taiwan:** Philips Taiwan Ltd., TAIPEI,  
Tel. (02) 2134 2900, Fax. (02) 2134 2929.

**Thailand:** Philips Electronics (Thailand) Ltd., BANGKOK,  
Tel. (02) 745 4090, Fax. (02) 398 0793.

**Turkey:** Türk Philips Ticaret A.S., GÜLTEPE/ISTANBUL,  
Tel. (0212) 279 2770, Fax. (0212) 282 6707.

**United Kingdom:** Philips Components Ltd., DORKING,  
Tel. (01306) 512 000, Fax. (01306) 512 345.

## **United States:**

- Display Components, ANN ARBOR, MI,  
Tel. (734) 996 9400, Fax. (734) 761 2776.
- Magnetic Products, SAUGERTIES, NY,  
Tel. (914) 246 2811, Fax. (914) 246 0487.
- Passive Components, SAN JOSE, CA,  
Tel. (408) 570 5600, Fax. (408) 570 5700.

**Yugoslavia (Federal Republic of):** Philips Components, BELGRADE,  
Tel. (0) 11 625 344/373, Fax. (0) 11 635 777.

## **Internet:**

- Display Components: [www.dc.comp.philips.com](http://www.dc.comp.philips.com)
- Passive Components: [www.passives.comp.philips.com](http://www.passives.comp.philips.com)

## **For all other countries apply to:**

Philips Components, Building BF-1, P.O. Box 218, 5600 MD EINDHOVEN,  
The Netherlands, Fax. +31-40-27 23 903.

COD18

© Philips Electronics N.V. 1998

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands

*Let's make things better.*

**Philips  
Components**



**PHILIPS**