

PHILIPS COMPONENTS

DATA SHEET

Camera Tubes

XQ1072

25.4 mm (1 inch) diameter Plumbicon® television camera tubes with high resolution lead-oxide photoconductive target, exclusively for use with X-ray image intensifiers with P20 output phosphor in medical equipment.

QUICK REFERENCE DATA

Diameter	25.4 mm (1 in)
Length	approx. 160 mm
Focusing	magnetic
Deflection	magnetic
Useful target area, circle diameter	15 mm
Spectral response	see Fig. 3
Sensitivity with P20 light source	typ. 500 μ A/lmF
Resolution at 13 I _p /mm (5Mhz)	typ. 70%
Heater	6.3 V, 95 mA

OPTICAL DATA

Dimensions of quality area on photoconductive target circle, dia 15 mm.

Orientation of image on target

For correct orientation of the image on the target the vertical scan should be essentially parallel to the plane passing through the tube axis and the mark on the tube base.

Faceplate

thickness	1.2 \pm 0.1 mm
refractive index	n= 1.49

®Registered Trade Mark for television camera tube

ACCESSORIES

Sock type 56605

Deflection and focusing coil unit

type AT1116S

ELECTRICAL DATA

Deflection

magnetic

Focusing

magnetic

Heating

Indirect by a.c. or d.c.

Heater voltage

 V_f 6.3 V \pm 5%Heater current, at $V_f = 6.3$ V I_f nom 95 mA

The heater voltage must not exceed 9.5 V r.m.s. For optimum performance stabilization of the heater voltage is recommended.

Capacitance

Signal electrode to all

 C_{as} 3 to 5 pF

This capacitance, which is effectively the output impedance, increases when the tube is inserted in the coil unit.

LIMITING VALUES (Absolute maximum rating system)

All voltages are referred to the cathode, unless otherwise stated.

notes

Signal electrode voltage	V_{as}	max.	50 V	
Grid 4 voltage (mesh)	V_{g4}	max.	1100 V	
Grid 3 voltage	V_{g3}	max.	800 V	
Voltage between grid 4 and grid 3	$V_{g4/g3}$	max.	450 V	
Grid 2 voltage	V_{g2}	max.	350 V	
Grid 2 dissipation	W_{g2}	max.	1W	
Grid 1 voltage, positive	V_{g1}	max.	0V	
Grid 1 voltage, negative	$-V_{g1}$	max.	125V	
Cathode to heater voltage, positive peak	V_{kfp}	max.	125V	
Cathode to heater voltage, negative peak	$-V_{kfp}$	max.	50 V	
Cathode heating time before drawing cathode current	t_h	min.	1 min	
External resistance between cathode and heater at $V_{kfp} > 10$ V	R_{kf}	min.	2 k Ω	
Ambient temperature, storage and operation	T_{amb}	max.	50°C	
		min.	30°C	
Faceplate temperature, storage and operation	T	max.	50°C	
		min.	30°C	1
Faceplate illuminance	E	max.	500 lx	2

OPERATING CONDITIONS AND PERFORMANCE

notes

Conditions

3

For a scanned circular area with a diameter of 15mm

Cathode voltage	V_k	0	V	
Signal electrode voltage	V_{as}	45	V	
Beam current	I_b			4
Grid 4 voltage	V_{g4}	960	V	
Grid 3 voltage	V_{g3}	600	V	
Grid 2 voltage	V_{g2}	300	V	
Grid 1 voltage	V_{g1}			4
Blanking voltage on grid 1, peak to peak	$V_{g1 \text{ p-p}}$	50±10V		
Faceplate illuminance (P20 light source)	E	approx.1 lx		
Faceplate temperature	T	20 to 45 °C		

Electron Gun Characteristics**Cutoff**Grid 1 voltage for cut-off at $V_{g2} = 300V$
without blanking V_{g1} -35 to -100 VBlanking voltage, peak to peak at $V_{g2,4} = 300V$
on grid 1
on cathode $V_{g1 \text{ p-p}}$ 50±10 V
 V_{kp-p} 25VGrid 2 current at normally required
beam currents $I_{g2} \leq 0.5 \text{ mA}$ **Performance**

notes

Dark current	I_d	< 3 nA	
Sensitivity at colour temperature of 2856K	min. 130	typ. 165 μ A/ImF	5
Sensitivity with P20 light source	min. 395	typ. 500 μ A/Im	
Peak signal current with E=1 lx (P20)	min. 160	typ. 200 nA	6
Gamma of transfer characteristic		0.95 \pm 0.05	
Spectral response:		see Fig. 3	
Resolution			7
Modulation depth i.e. uncompensated amplitude response at 13 lp/mm (scanned area circle 15 mm) at the center of the picture (5 Mhz, 400 TV lines)		typ. 70%	
Modulation transfer characteristic		see Fig. 4	
Decay lag, P20 light source, measured with a signal current of 200 nA, beam adjusted for correct stabilization after the target has been illuminated for at least 5 s.			
Residual signal after dark pulse of 50 ms	max. 8%	typ. 6%	
Residual signal after dark pulse of 60 ms	max. 6%	typ. 4%	
Residual signal after dark pulse of 200 ms	max. 2.5 %	typ. 1.5%	

NOTES

1. The tube can withstand short excursions up to 70 °C without any damage or irreversible degradation in performance.

2. For short intervals. During storage the tube face shall be covered with the plastic hood provided; when the camera is idle the lens shall be capped, in stand-by also the beam will be cut-off.
3. The operating conditions and performance data quoted, relate to operation of the tube in coil units AT1116S. See relevant data of deflection/focusing assemblies. Scanning amplitude should be adjusted such that the useful target area of 15 mm is displayed on a standard monitor as a circular area with a diameter equal to the raster height.
4. The beam current I_b as obtained by adjusting the control grid voltage (grid 1) is set to max. 500 nA. I_b is not the total current available in the scanning beam, but is defined as the maximum amount of signal current I_s , that can be obtained with this beam. See note 6.
5. Measuring conditions: illuminance level 4.54 lx at a color temperature of 2856K and a filter Schott VG9 inserted in the light path.
6. The peak signal currents are measured on a waveform oscilloscope and with a uniform illumination on the 15 mm ϕ target area. When measured with an integrating instrument connected in the signal-electrode lead the average signal currents will be smaller:
 - a) By a factor α ($\alpha = \frac{100-\beta}{100}$), β being the total blanking time in %; for the CCIR system α amounts to 0.75; for the EIA system α amounts to 0.83.
 - b) By a factor δ , δ being the ratio of the active target area (circle with: 15 mm ϕ) to the area which would correspond with the adjusted scanning amplitude (15 mm x 20 mm). This ratio amounts to $\delta = 0.59$. The total ratio of integrated signal current, I_s , to the peak signal current, I_{sp} , amount to $\alpha \times \delta = 0.44$ for the CCIR system and 0.49 for EIA system.
7. As measured with a 50 mm Leitz Summicron lens having a sine response of approximately 85 % at 400 TV lines at $f : 5.6$. The published 70% typ. is uncorrected. Tube resolution is higher. Measured with 100 nA signal current and a beam current just sufficient to stabilize a signal current of 500 nA. The horizontal amplitude response can be raised by means of suitable correction circuits, which affect neither the vertical resolution nor the limiting resolution.

Diagrams

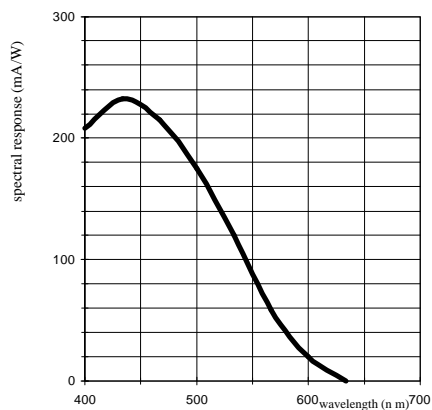


Fig. 3 Typical spectral response curve.

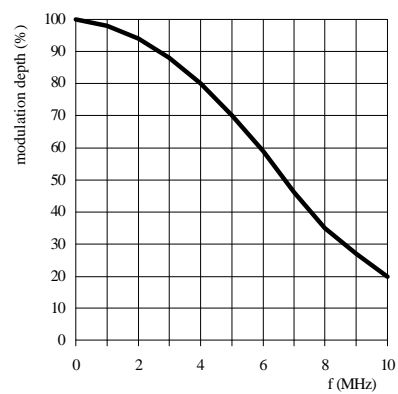


Fig. 4 Typical square-wave response curve.

Mechanical Data

Mounting Position: any

Mass: approx. 60 g

Base: IEC 67-I-33a (JEDEC E8-11)

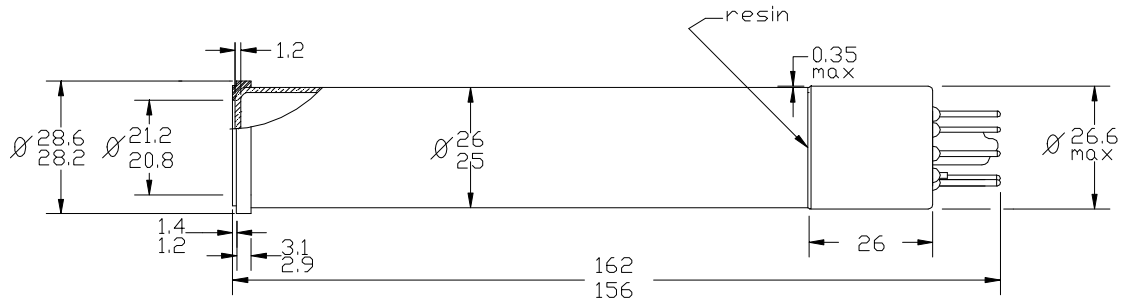


Figure 1.

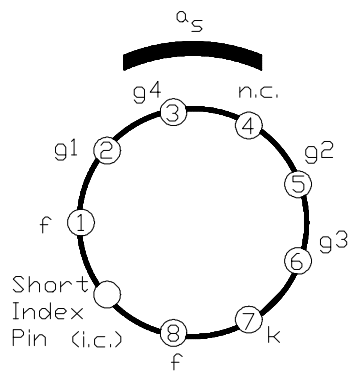


Fig. 2a.

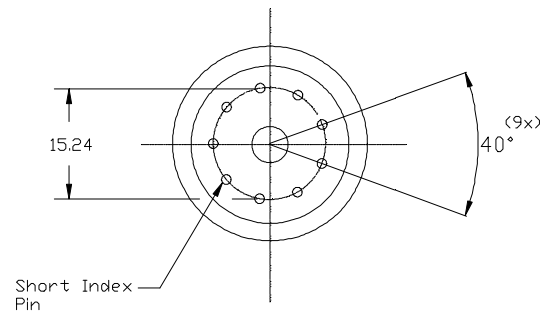


Fig 2b.

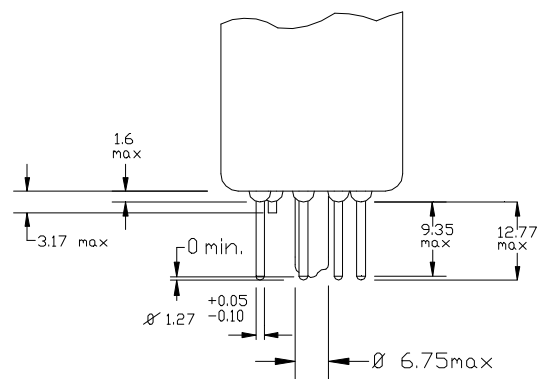


Fig 2c.

Philips Camera Tubes Sales Offices

Philips Components
Att: Kent Holston
4546 B10 El Camino Real #189
Los Altos, CA 94022
Tel: (650) 960-3893
Fax: (650) 960-3892

Philips Components
Att: Mark Reinhardt
123 Nashua Road, Suite 244
Londonderry, NH 03053
Tel: (603) 425-7440
Fax: (603) 425-7416

Philips Components
100 Providence Pike
Slatersville, RI 02876-2078
Tel: (401) 762-3800
Fax: (401) 767-4493

For Complimentary Literature, Call our Literature Center at 1-800-447-3762